RCA PF030146 AB

CITED BY APPLICANT

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04B 7/00 — A2

(11) International Publication Number: WO 00/03494

(43) International Publication Date: 20 January 2000 (20.01.00)

(21) International Application Number: PCT/US99/15579

(22) International Filing Date: 9 July 1999 (09.07.99)

(30) Priority Data:
09/112,610 9 July 1998 (09.07.98) US

(71) Applicant: ACT WIRELESS [US/US]; Suite 14, 4710 East Elwood Street, Phoenix, AZ 85040 (US).

(72) Inventors: SCHUERMAN, Ken; Chandler, AZ (US). MEISS, James; Scottsdale, AZ (US). WEBBER, Mark; Chandler, AZ (US).

(74) Agent: SWERNOFSKY LAW GROUP; P.O. Box 390013, Mountain View, CA 94039-0013 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
Without international search report and to be republished upon receipt of that report.

(54) Title: SATELLITE NETWORK TERMINAL

OMT / Tx Reject Filter / Feed Horn

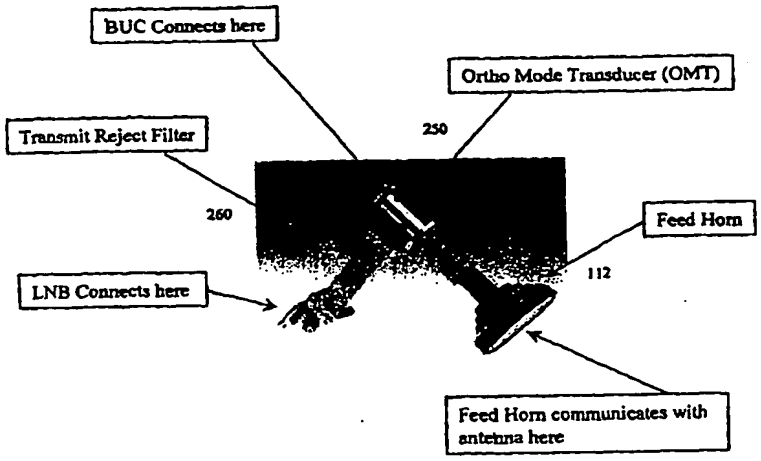

(57) Abstract

The invention provides a method and system for simplified signal processing between the feed horn assembly and the frame relay equipment. Data is directly modulated from the frame relay equipment onto an L-band carrier and block up-converted for output at the feed horn. Block up-conversion is aided by adding a DC power signal and a 10.0 megahertz frequency reference signal to the L-band modulated signal (so as to protect the frequency reference against variations due to external elements), while maintaining spectral purity of the L-band modulated signal.

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		

13 Title of the Invention

14

15 Satellite Network Terminal

16

17 Background of the Invention

18

19 1. Field of the Invention

20

21 This invention relates to satellite network terminals.

22

23 2. Related Art

24

Signals received at a satellite network terminal are conventionally coupled from a feed horn at a satellite dish antenna, to an antenna transceiver (i.e. outdoor unit), to a signal up/down converter, to a modulator/demodulator for interpretation and routing. For example, when the satellite network terminal is used in a frame relay network, the modulator/demodulator is coupled to frame relay network equipment such as a frame relay receiver-filter and a frame relay switch. The feed horn is located at or near the focus of a dish antenna for the satellite network terminal, and is coupled to the antenna transceiver using a cable.

In known systems, the feed horn at the satellite dish antenna is disposed to receive and output signals modulated on a carrier in a first known frequency range such as C-band (about 11.7 to about 12.2 gigahertz) or Ku-band (about 14 to about 14.5 gigahertz). The antenna transceiver is disposed to receive those signals and output signals modulated on a carrier in a second frequency range such as L-band (about 950 to about 1450 megahertz). The signal up/down converter is disposed to receive those signals and output signals modulated on a carrier in a third known frequency range (about 70 megahertz ± 18 megahertz, or alternatively about 140 megahertz ± 36 megahertz).

A first problem known in the art is that the antenna transceiver and up/down converter are complex and expensive; it would be desirable to be able to modulate and demodulate the satellite signal directly between the feed horn at the satellite dish antenna and the modulator/demodulator. This would reduce required signal filtering. It would also greatly simplify, and reduce the expense of, producing the transmitted satellite signal.

A second problem known in the art is that the feed horn at the satellite dish antenna is exposed to external elements, such as weather, heat and cold. The cable coupling the feed horn to the antenna transceiver must be relatively short, because there is a substantial amount of power loss for signals transmitted through that cable with a carrier frequency at or above about the 1 gigahertz frequency range. The relatively short cable limits design options for placement of the modulator/demodulator, particularly if the antenna transceiver and up/down converter have been eliminated in response to the first problem noted above.

Accordingly, it would be advantageous to provide for greatly simplified signal processing between the feed horn and the frame relay equipment. This advantage is achieved in an embodiment of the invention in which data is directly modulated from the frame relay equipment onto an L-band carrier and block up-converted for output at the feed horn.

Summary of the Invention

The invention provides a method and system for simplified signal processing between the feed horn and the frame relay equipment. Data is directly modulated from the frame relay equipment onto an L-band carrier and block up-converted for output at the feed horn. Block up-conversion is aided by adding a DC power signal and a 10 megahertz frequency reference signal to the L-band modulated signal (so as to protect the frequency reference against variations due to external elements), while maintaining spectral purity of the 10 megahertz frequency and the L-band modulated signal. Additionally, a frequency reference is generated in the modulator synthesizer circuit by a phase locked loop (PLL) circuit using a numerically controlled oscillator (NCO) as a reference signal and a crystal filter to band-pass filter the output at 10.7-

megahertz. A noise floor for the NCO is set so that the output signal is clipped at the desired output frequency; this increases the signal/noise ratio at that desired output frequency.

Brief Description of the Drawings

Figure 1A shows a block diagram of a system for simplified signal processing between a satellite antenna and a set of frame relay equipment.

Figure 1B shows a diagram of a transmit reject filter, ortho mode transducer, and feed horn assembly.

Figure 2A shows a block diagram of a modulator and down converter coupled to a block up-converter.

Figure 2B shows a block diagram of a down converter including a commercial tuner module, a triplexer, a frequency reference, and a DC power supply.

Figure 2C shows a block diagram of a block up converter (BUC).

Figure 2D shows a block diagram of a low noise block down converter (LNB).

Figure 2E shows a block diagram of a modulator including a modulator element, a DC power supply, a frequency reference, and a triplexer.

Figure 3 shows a block diagram of the modulator synthesizer including the generation of an approximately 10.7 megahertz synthesizer frequency reference. This synthesizer generates the modulator L-Band carrier signal.

Figure 4 shows a triplex function element for combining an L-band modulated signal, a DC power signal, and a frequency reference signal.

Detailed Description of the Preferred Embodiment

In the following description, a preferred embodiment of the invention is described with regard to preferred process steps and data structures. Those skilled in the art would recognize after perusal of this application that embodiments of the invention can be implemented using circuits adapted to particular process steps and data structures described herein, and that implementation of the process steps and data structures described herein would not require undue experimentation or further invention.

Inventions described in this application can be used in conjunction with inventions described in the following patent documents:

- U.S. Application Serial No. 08/806,288, titled "Transmitting Multiplexed Frames on Communication Links", filed February 26, 1997, in the name of inventor Alain Gravel, assigned to ACT Networks, Inc., attorney docket number ANET-002; and

- U.S. Application Serial No. 08/911,473, titled "Flexible Voice Shelf", filed August 14, 1997, in the name of inventors Kannan Rangarajan, David G. Stanfield, and Dan G. Wilson, and assigned to ACT Networks, Inc., attorney docket number ANET-004.

Each of these documents is hereby incorporated by reference as if fully set forth herein.

System Elements

Figure 1A shows a block diagram of a system for simplified signal processing between a satellite antenna and a set of frame relay equipment.

A system 100 includes a satellite dish antenna 110, including a parabolic dish reflector 111 and a feed horn 112. The feed horn 112 is disposed to receive and to transmit signals at a first set of known satellite transmission frequencies, such as those in C-band or Ku-band. Feed horns 112 for use with satellite dish antennas 110 are known in the art of satellite communication. An exemplar of a feed horn assembly including the feed horn, the mounts for the BUC (block up converter), LNB (low-noise block converter) and the transmit reject filter and the OMT (ortho mode transducer) is shown in Figure 1B.

In a preferred embodiment the feed horn 112 is coupled to an antenna transceiver 113, which is disposed to couple signals to and from the feed horn 112 at a second set of known frequencies, such as those in L-band. Note that in a conventional assembly the outdoor unit or

antenna transceiver includes everything except the feed horn (i.e. the BUC, LNB, OMT and the transmit or Tx reject filter).

The antenna transceiver 113 is coupled to a hybrid modem including a modulator and down converter 120, which is disposed to couple signals to and from the antenna transceiver 113 at L-band frequencies.

The modulator and down converter 120 is coupled to a set of frame relay network equipment 130, which is disposed to transmit, receive and filter, and switch frames in a frame relay system.

In a preferred embodiment, the frame relay network equipment 130 includes the Skyframe™ 800-EM product, available from ACT Networks, Inc., of Camarillo, California. The Skyframe™ 800-EM product preferably includes a plurality of digital frame receiver/filters, such as the Skyframe™ DEF-01 product, also available from ACT Networks, Inc., of Camarillo, California, and at least one modulator/demodulator card, such as the Skyframe™ MOS-01-EM product, also available from ACT Networks, Inc., of Camarillo, California.

The modulator and down converter 120 is disposed to receive signals modulated on L-band frequencies, and to down convert those signals to a 70-megahertz carrier, to provide signals in the 70 megahertz ± 18 megahertz frequency range. Operation of the modulator and down converter 120 in this regard is further described with reference to figures 2A and 2B.

The modulator and down converter 120 is also disposed to receive digital data from the frame relay network equipment 130, and to directly modulate that data onto L-band frequencies. Optionally, a 70 megahertz demodulator is included in the modulator and down converter unit. This minimizes cost and is ideal for remotely located sites. Additionally including the 70 megahertz demodulator with the modulator down converter unit frees a slot in the frame relay equipment for other hardware. Operation of the modulator and down converter 120 in this regard is further described with reference to figure 2A and figure 2B.

Modulator and Down Converter

Figure 2A shows a block diagram of a modulator and down converter coupled to a block up-converter.

The modulator and down converter 120 includes a modulator 210 and a down converter 220.

Referring to figures 1A and 2A, the modulator 210(L-band modulator) is coupled to the frame relay network equipment 130 so as to receive digital data therefrom. The modulator 210 is also coupled to a BUC (block up converter) 230, so as to transmit signals on L-band frequencies for transmission by the satellite dish antenna 110.

The down converter 220 is coupled to the frame relay network equipment 130 so as to transmit signals thereto using a 70-megahertz carrier. The down converter 220 is also coupled to an LNB (low-noise block converter) 240, so as to receive signals on L-band frequencies for down conversion. Optionally, the demodulator 200 is coupled to the frame relay equipment

130 to transmit digital data thereto. Additionally, the demodulator 200 is coupled to the down converter 220 to receive signals using a 70 megahertz carrier as shown in Figure 2A. Figure 2B shows a block diagram of the elements of the down converter 220.

As shown in Figure 2A the BUC 230 is coupled to an OMT (ortho mode transducer) 250, so as to transmit signals to the feed horn 112. Figure 2C shows a block diagram of the elements of the block up converter (BUC).

As shown in Figure 2A the LNB 240 is coupled to a transmit-reject element 260, which is coupled to the OMT 250, so as to receive signals from the feed horn 112. Figure 2D shows a block diagram of the elements of the low noise block down converter (LNB). The transmit-reject element 260 is disposed to filter out frequency components of signals transmitted by the BUC 230 to the OMT 250, and to transmit signals received by the feed horn 112 to the LNB 240 for processing. Operation of transmit-reject elements 260 is known in the art of satellite communication.

The OMT 250 is coupled to the feed horn 112, so as to transmit and receive signals to and from the feed horn 112. Coupling between the OMT 250 and the feed horn 112 is known in the art of satellite communication.

As shown in Figure 2E the modulator 210 includes an input port 211, a modulator element 212 coupled to the input port 211, a DC power supply 223, a frequency reference 224, a triplex function element 225, and an output port 226.

The input port 211 is coupled to the frame relay network equipment 130, and is coupled to the modulator element 212. The modulator element 212 modulates incoming digital data from the frame relay network equipment 130 onto an L-band carrier frequency, to provide a modulated signal in the L-band frequency range. The modulator element 212 is coupled to the triplex function element 225.

The modulator element 212 includes an L-band reference frequency synthesizer element 213 and a quadrature modulator element 214. The modulator element 212 processes the incoming digital data from the frame relay network equipment 130, generates two quadrature signals (that is, I and Q data streams) and modulates those I and Q data streams onto the L-band reference frequency carrier in quadrature. In a preferred embodiment, the quadrature modulator element 214 includes an RF2422 circuit, available from R.F. Microdevices, of Greensboro, NC. Quadrature modulation is known in the art of signal processing.

The DC power supply 223 provides a constant DC power signal, and is coupled to the triplex function element 225.

The frequency reference 224 provides a constant 10.0 megahertz reference sine wave, and is coupled to the triplex function element 225.

The triplex function element 225 combines the output of the modulator element 212, the DC power supply 223, and the frequency reference 224, and provides a combined signal output at the output port 226. Operation of the triplex function element 225 is further described with reference to figure 4.

The BUC 230 includes a signal separator element 231, a phase-locked multiplier element 232, a mixer 233, and an amplifier 234. The signal separator element 231 is disposed for coupling to the modulator element 212, using a high-quality signal transmission cable to prevent signal degradation. The signal separator element 231 isolates the 10.0 megahertz reference sine wave and provides that reference frequency to the carrier synthesizer element 232. The signal separator element 231 isolates the DC power and provides that power as required throughout the BUC 230.

The carrier synthesizer element 232 is coupled to the 10.0-megahertz reference sine wave and provides an output carrier signal to mixer 233. In a preferred embodiment, the output carrier signal is about 14.0 to 14.5 gigahertz (for Ku-band). Carrier synthesizers are known in the art of signal processing.

The signal separator element 231 also isolates the L-band modulated digital data and provides that signal to the mixer 233. The mixer 233 translates the L-Band modulated carrier to a Ku-band carrier frequency for transmission. Mixers are known in the art of signal processing.

The amplifier 234 is coupled to the mixer 233, to receive the modulated Ku-band signal and to amplify it by about 50 decibels, for coupling to the feed horn 112 and transmission by the satellite dish antenna 110. Amplifiers are known in the art of signal processing.

Modulating Digital Data onto an L-Band Carrier

Figure 3 shows a means for providing a numerically controlled 10.7-megahertz ± 7.5 kilohertz reference sine wave. This sine wave is used as the reference input to a single loop synthesizer 360.

The frequency reference 224 includes a first frequency reference 310(part of 224), an NCO (numerically controlled oscillator) 320 and a DAC (digital to analog converter) 330, a band-pass filter 340, a frequency divider 350, a PLL (phase locked loop) 360, and a low-pass filter 370, coupled as shown in the figure. The PLL 360 includes a phase detector 361, a loop filter 362, a VCO (voltage controlled oscillator) 363, and a programmable frequency divider 364, coupled in a feedback configuration as shown in the figure.

The first frequency reference 310 includes a 40-megahertz sine wave signal. In a preferred embodiment, a temperature controlled quartz crystal oscillator generates this signal. Crystal oscillators are known in the art of signal processing.

The NCO 320 is coupled to an output of the first frequency reference 310, and includes a digital input port 321, so as to receive a 32-bit digital value specifying the frequency multiplier the NCO 320 applies to its input. The frequency multiplier is less than one, so that the output signal from the NCO 320 and the DAC 330 comprises a 10.7-megahertz ± 7.5 kHz sine wave.

In a preferred embodiment, the NCO 320 and the DAC 330 are embodied in a single circuit, such as the AD9830 product, available from Analog Devices Corporation of Nor-

wood MA. Numerically controlled oscillators and digital to analog converters are known in the art of signal processing.

The DAC 330 is coupled to an output of the NCO 320, and is disposed to convert a digital signal output from the NCO 320 to an analog signal. The DAC 330 includes a resistor 331 coupled to adjust the output level of the DAC 330. In a preferred embodiment, the resistor 331 is set so as to cause the 10.7-megahertz component of the output signal to clip at the maximum amplitude reachable by the DAC 330. This causes the signal-to-noise ratio of the DAC 330 to be maximized for the 10.7-megahertz component of the output signal.

The band-pass filter 340 is coupled to an output of the DAC 330. The band-pass filter 340 has a center frequency of 10.7-megahertz and a 3-decibel roll-off loss for a ± 7.5 kilohertz of difference from that center frequency. The design of band-pass filters is known in the art of signal processing, as is the design of band-pass filters with selected roll-off loss. The band-pass filter 340 imposes about an 80-decibel loss for frequencies greater than ± 40 kilohertz deviation from the nominal 10.7 megahertz NCO output frequency.

The frequency divider 350 is coupled to an output of the band-pass filter 340. The frequency divider 350 divides the signal output by the band-pass filter 340 (intended to be a substantially pure sine wave at about 10.7 megahertz) by 12, to generate a square wave 890 kilohertz signal.

The PLL 360 includes a digital input port 365 and an output port 366. The PLL 360 includes the phase detector 361, the loop filter 362, the VCO 363, and the programmable

frequency divider 364, coupled in a feedback configuration. The digital input port 365 receives a digital value specifying the frequency divider the PLL 360 applies to its input signal. The programmable frequency divider 364 is responsive to the input signal so as to divide a signal appearing at the output port 366 and couple a resultant to the phase detector 361. The output port 366 provides the output of the PLL 360. Phase-locked loops are known in the art of signal processing.

The attenuator / amplifier 367 is coupled to the output port 366 of the PLL. The attenuator / amplifier combination is coupled to the low pass filter 370. The attenuator / amplifier 367 provides greater than 55 decibels of isolation between the modulator 214 and the synthesizer VCO 363. Without this isolation, digital data signals present in the modulator 214 would feed backwards into the VCO 363 corrupting its spectral purity and seriously degrading the integrity of the modulator output signal. When an input digital data signal is modulated onto the carrier in quadrature (that is, having I and Q components), the signal output from the PLL 360 includes extraneous components at two times the desired output frequency. The low-pass filter 370 removes these extraneous components.

Triplex Function Element

Figure 4 shows a triplex function element for combining an L-band modulated signal, a DC power signal, and a frequency reference signal.

The triplex function element 225 includes a signal input port 410, a high-pass filter 420, a reference input port 430, a band-pass filter 440, a power input port 450, a low pass filter, a first summing element 460, a second summing element 470, and an output port 480.

The signal input port 410 is disposed for coupling to an incoming L-band signal, which includes digital data that has been modulated onto a carrier in the L-band frequency range of about 950 megahertz to about 1450 megahertz. The signal input port 410 is coupled to the high-pass filter 420, which prevents frequency components of the other two inputs 430 and 450 from feeding back into the L-Band signal path.

The reference input port 430 is disposed for coupling to an incoming reference signal at 10.0 megahertz. The reference input port 430 is coupled to the band-pass filter 440, which removes frequency components other than the desired reference frequency component at 10.0 megahertz, and prevents frequency components from the other two inputs 410 and 450 from feeding back into the 10.0 megahertz signal path.

The power input port 450 is disposed for coupling to DC power signal, for example +24 V. The power input port is coupled to the low pass filter which remove unwanted frequency components from the power input signal. The band-pass filter 440 and the low pass filter are coupled to the first summing element 460, which includes a set of first filter elements 461 and a first summing node 462, to sum the reference frequency component at 10.0 megahertz with the DC power signal. The high-pass filter 420 and the first summing element 460 are coupled to the second summing element 470, which includes a set of second filter elements 471 and a sec-

ond summing node 472, to sum the L-band modulated digital data with the signal provided by the first summing element 460.

The second summing element 470 is coupled to the output port 480, to provide an output which is the sum of the three inputs: (1) the L-band modulated digital data, (2) the 10.0 megahertz reference frequency component, and (3) the DC power signal.

Alternative Embodiments

Although preferred embodiments are disclosed herein, many variations are possible which remain within the concept, scope, and spirit of the invention, and these variations would become clear to those skilled in the art after perusal of this application.

Claims

1. A method for satellite communication, including steps for

receiving digital data from digital communications equipment and directly modulating said digital data onto a first carrier signal to provide a first modulated signal, and up-converting said first modulated signal for output at a satellite terminal;

receiving modulated satellite signals at said satellite terminal, down-converting said modulated satellite signals, providing said down converted modulated satellite signals to said digital communications equipment for demodulation, and demodulating down-converted satellite signals for output to said digital communications equipment.

2. A method as in claim 1, wherein said digital communications equipment includes a frame relay.

3. A method as in claim 1, wherein said first carrier signal includes an L-band carrier frequency.

4. A method as in claim 1, wherein said down-converted satellite signals are demodulated by a 70 MHz demodulator before said step of providing said down-converted satellite signals to said digital communications equipment.

5. A method as in claim 1, wherein said steps for up-converting include steps for combining said first modulated signal with a power signal prior to up-converting, while maintaining spectral purity of said first modulated signal.

6. A method as in claim 1, wherein said steps for up-converting include steps for combining said first modulated signal with a frequency reference signal prior to up-converting, while maintaining spectral purity of the reference signal and said first modulated signal.

7. A method for generating a frequency reference signal to a PLL for synthesizing an L-Band carrier signal that includes steps for

providing a first reference signal to a numerically controlled oscillator;

providing an output of said numerically controlled oscillator to a digital to analog converter; providing an output of said digital to analog converter to a crystal band-pass filter; and

providing an output of said band-pass filter to a phase-locked loop.

8. A method as in claim 5, including steps for setting a noise floor for said digital to analog converter so said output of said digital to analog converter clips at a selected output level for said frequency reference signal.

9. A method as in claim 5, including steps for setting a noise floor for said digital to analog converter so said output of said digital to analog converter has a maximum signal to noise ratio at a selected output frequency for said frequency reference signal.

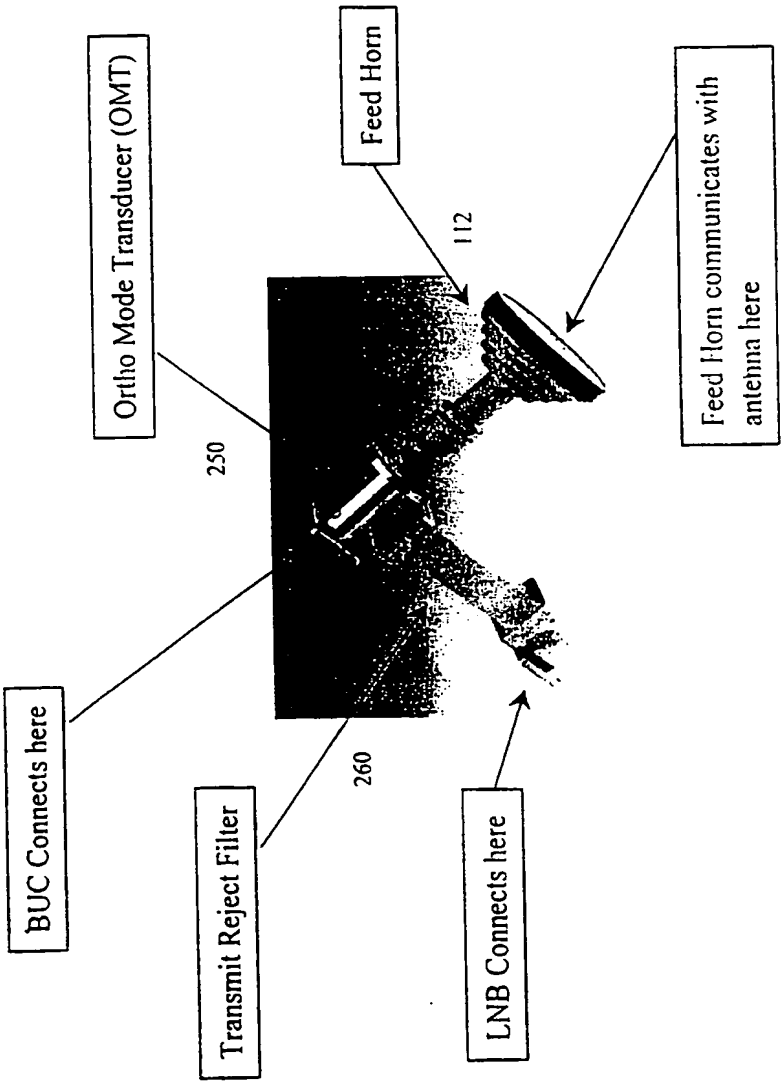
OMT / Tx Reject Filter / Feed Horn
Ortho Mode Transducer (OMT)
Feed Horn
112
Feed Horn communicates with antenna here
250
BUC Connects here
Transmit Reject Filter
260
LNB Connects here

Figure 1B

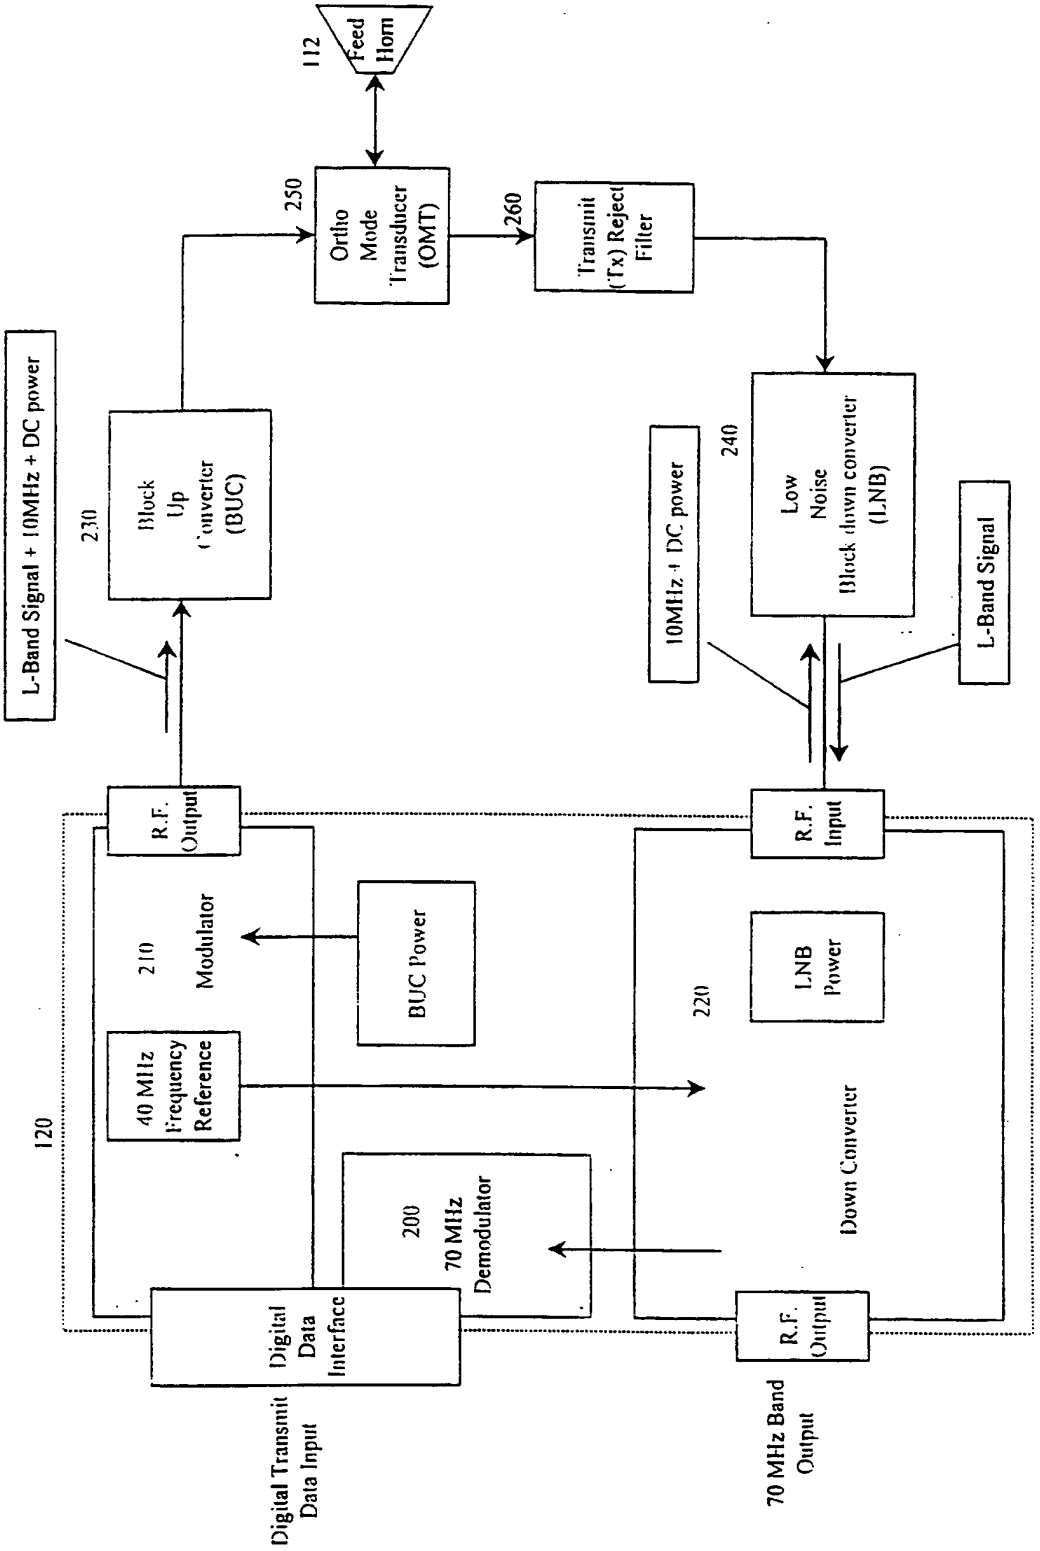
SL-512V, Hybrid Modem coupled to a BUC and LNB
112
Feed Horn
250
Ortho Mode Transducer (OMT)
260
Transmit (Tx) Reject Filter
L-Band Signal + 10MHz + DC power
230
Block Up Converter (BUC)
10MHz + DC power
240
Low Noise Block down converter (LNB)
L-Band Signal
R.F. Output
R.F. Input
210
Modulator
BUC Power
LNB Power
220
40 MHz Frequency Reference
120
200
70 MHz Demodulator
Down Converter
Digital Data Interface
R.F. Output
Digital Transmit Data Input
70 MHz Band Output

Figure 2A

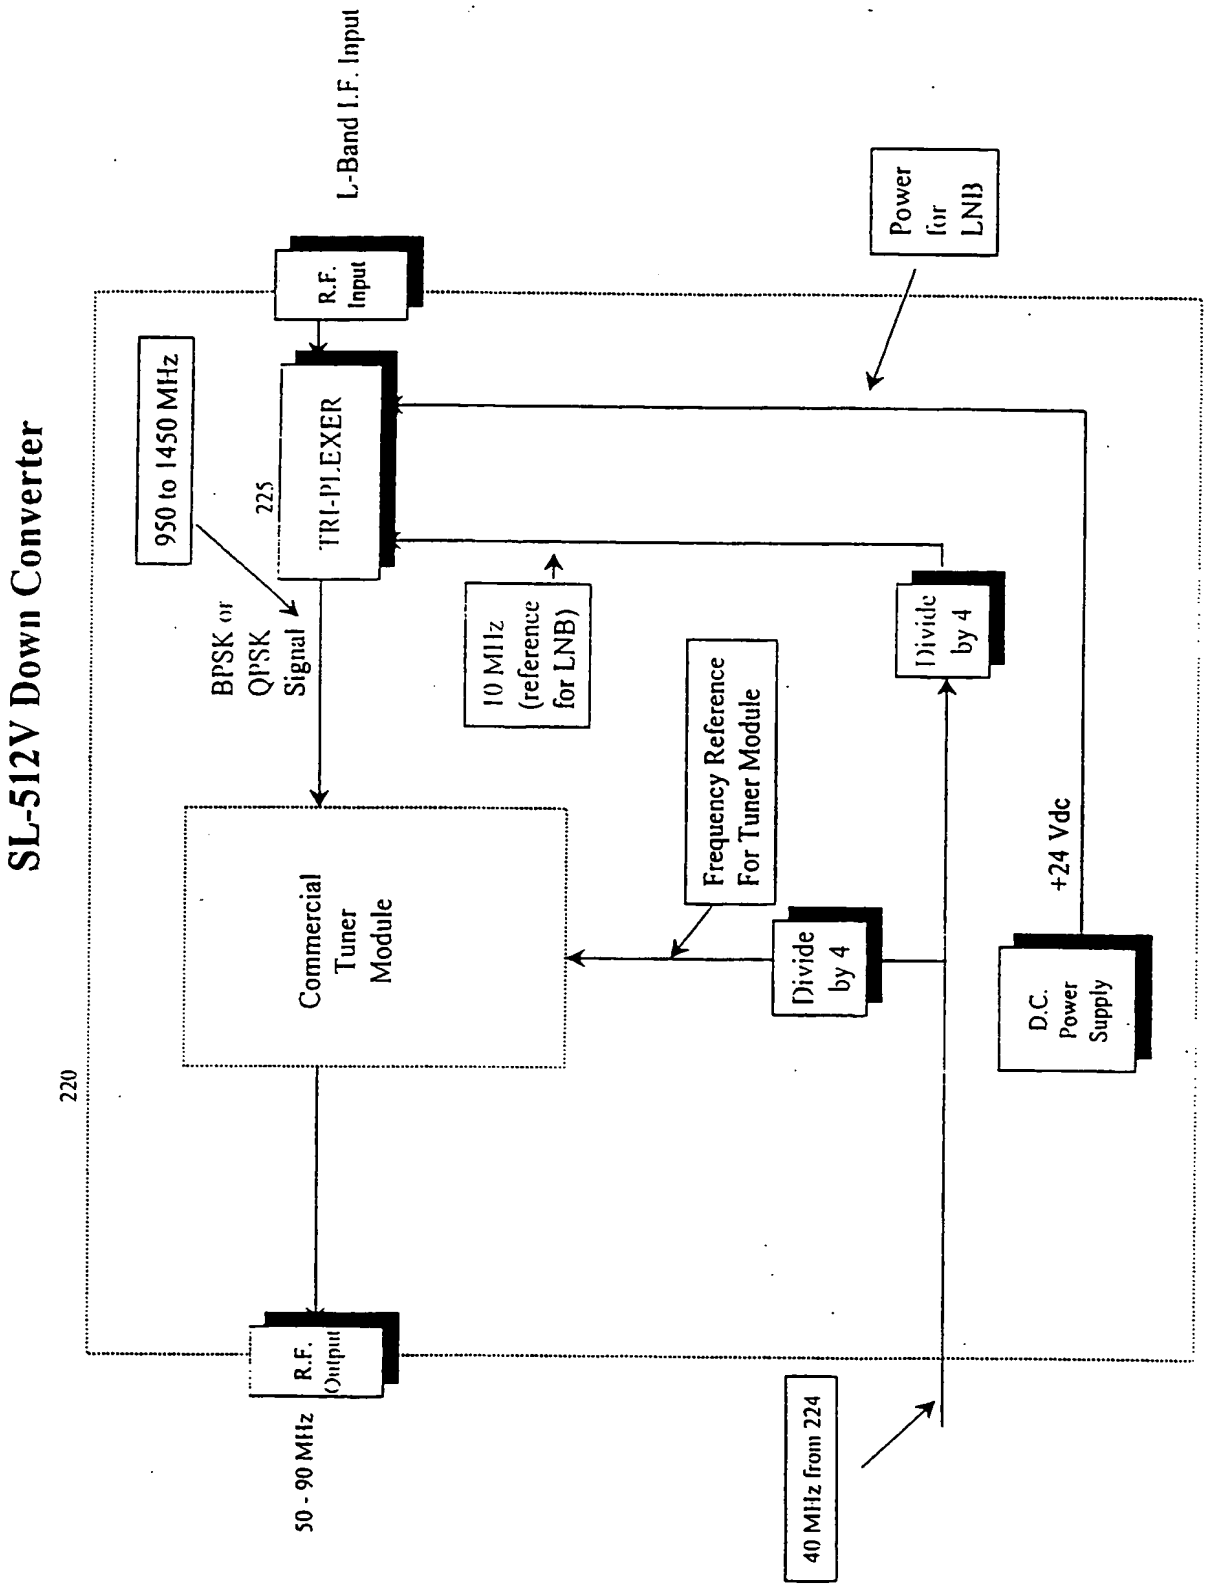
SL-512V Down Converter
L-Band I.F. Input
R.F. Input
Power for LNB
950 to 1450 MHz
225
TRI-PLEXER
BPSK or QPSK Signal
10 MHz (reference for LNB)
Divide by 4
Frequency Reference For Tuner Module
Commercial Tuner Module
Divide by 4
+24 Vdc
D.C. Power Supply
220
R.F. Output
50 - 90 MHz
40 MHz from 224

Figure 2B

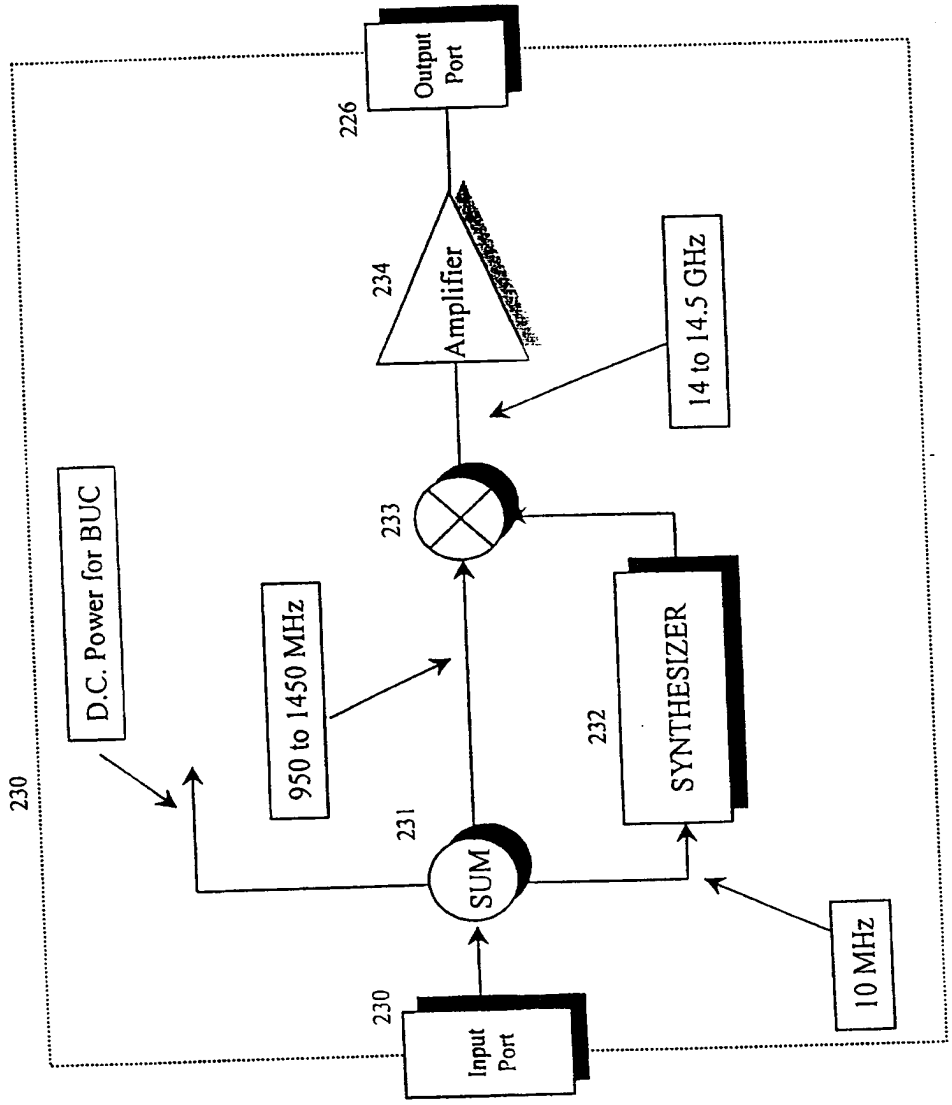
Block Up Converter (BUC)
230
D.C. Power for BUC
950 to 1450 MHz
231
SUM
233
234
Amplifier
226
Output Port
14 to 14.5 GHz
232
SYNTHESIZER
10 MHz
230
Input Port

Figure 2C

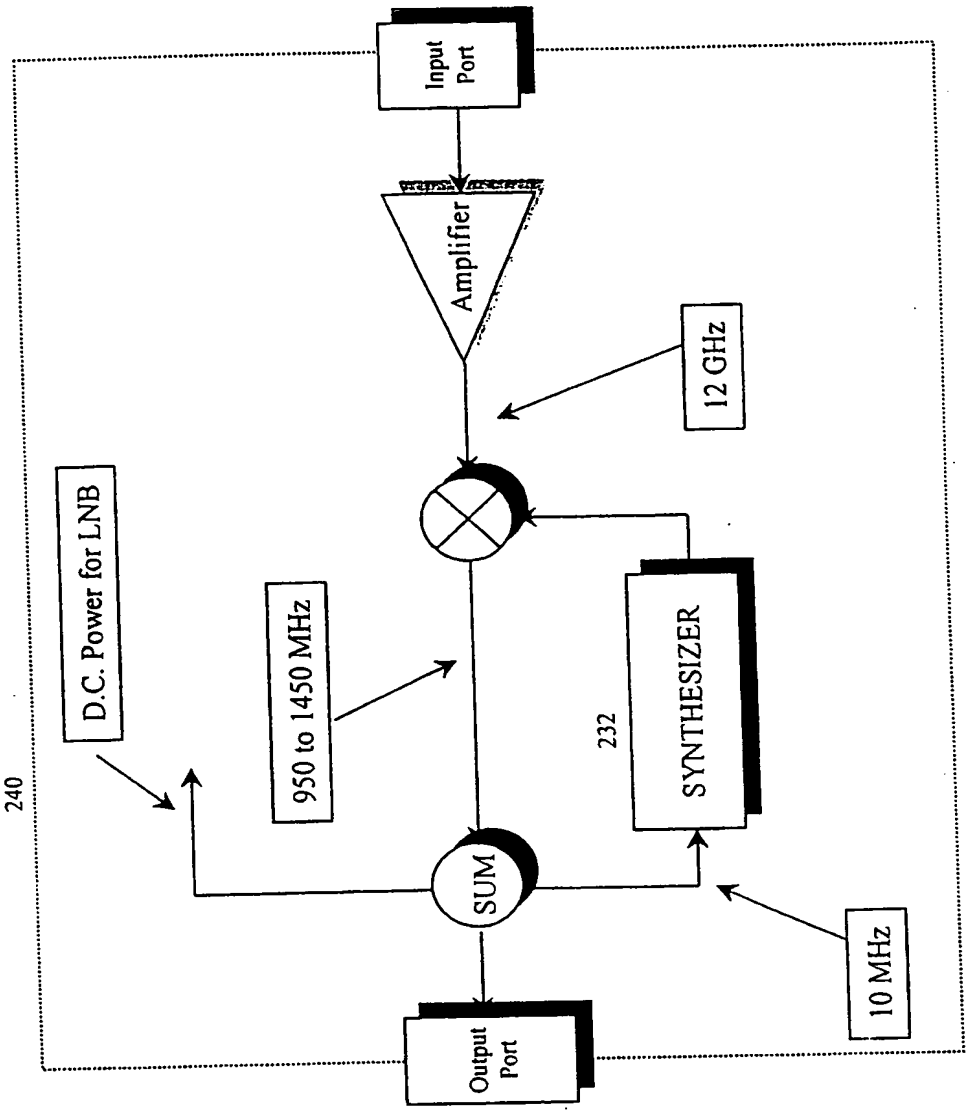
Low Noise Block down converter (LNB)
240
Input Port
Amplifier
12 GHz
D.C. Power for LNB
950 to 1450 MHz
232
SYNTHESIZER
SUM
10 MHz
Output Port

Figure 2D

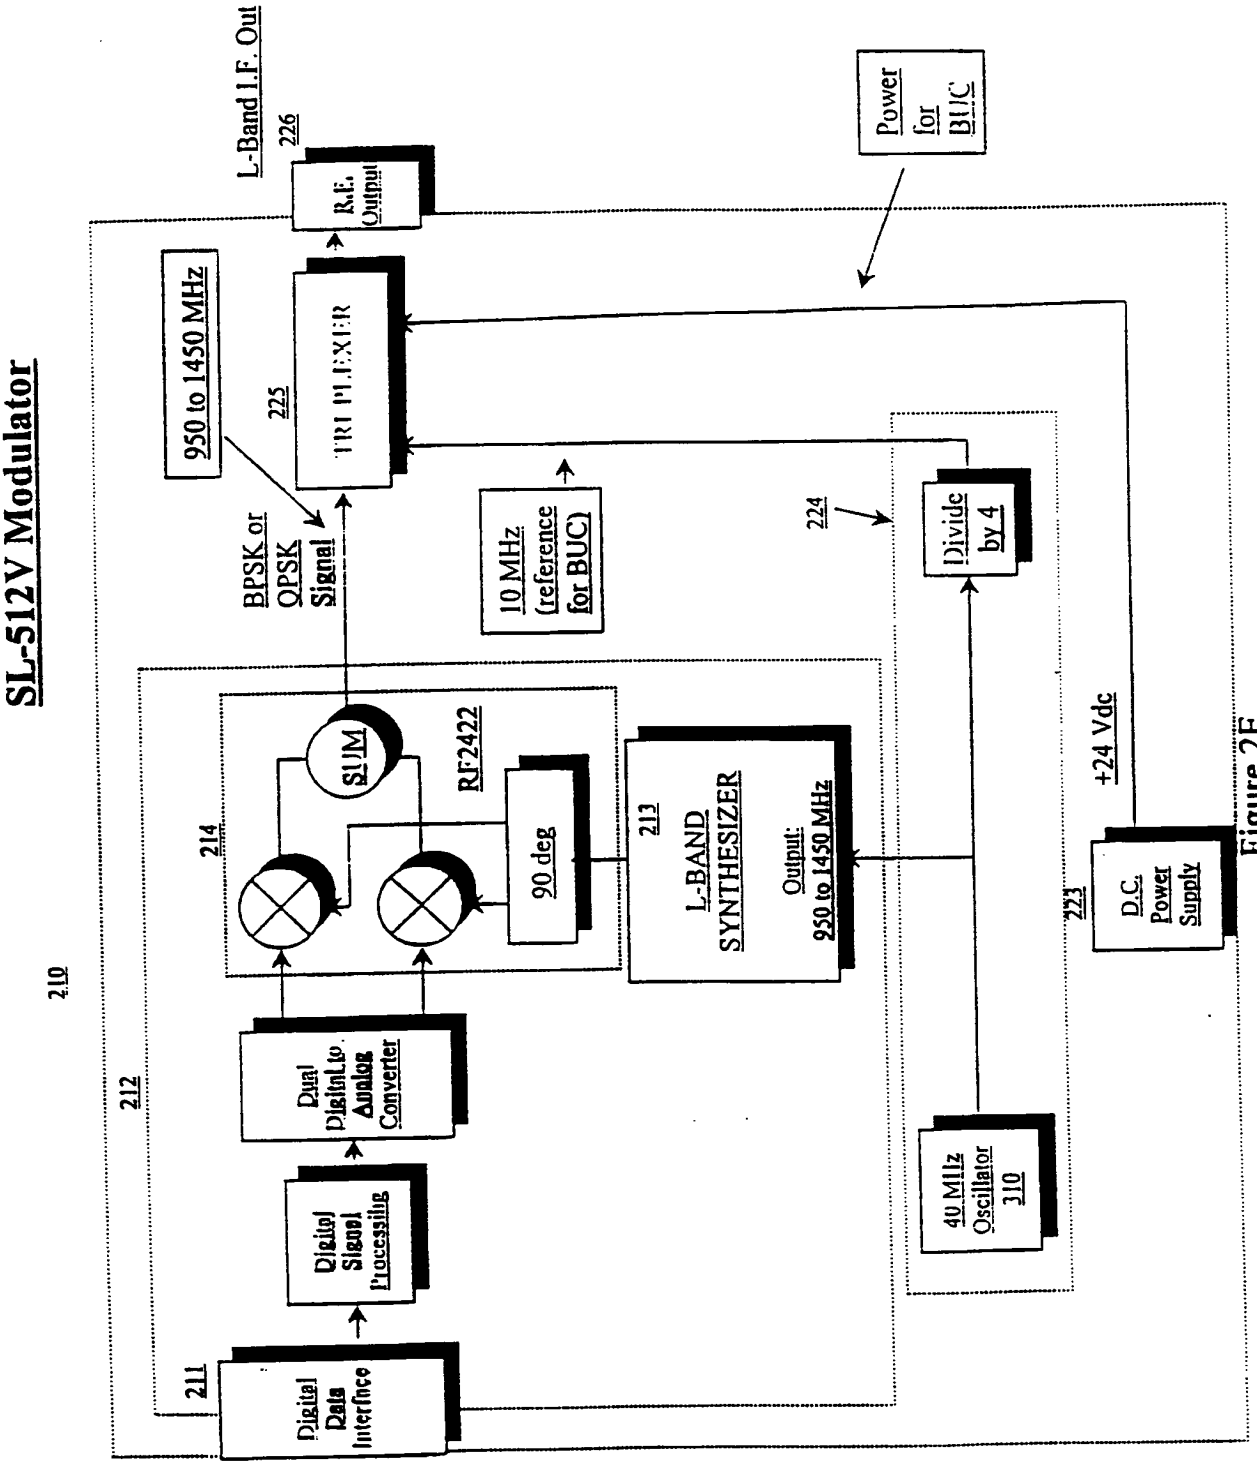
SL-512V Modulator
210
L-Band I.F. Out
226
R.F. Output
Power for BUC
950 to 1450 MHz
225
BPSK or QPSK Signal
10 MHz (reference for BUC)
224
Divide by 4
214
SUM
RF2422
90 deg
213
L-BAND SYNTHESIZER
Output: 950 to 1450 MHz
+24 Vdc
223
D.C. Power Supply
212
Dual Digital to Analog Converter
Digital Signal Processing
211
Digital Data Interface
40 MHz Oscillator 310

Figure 2E

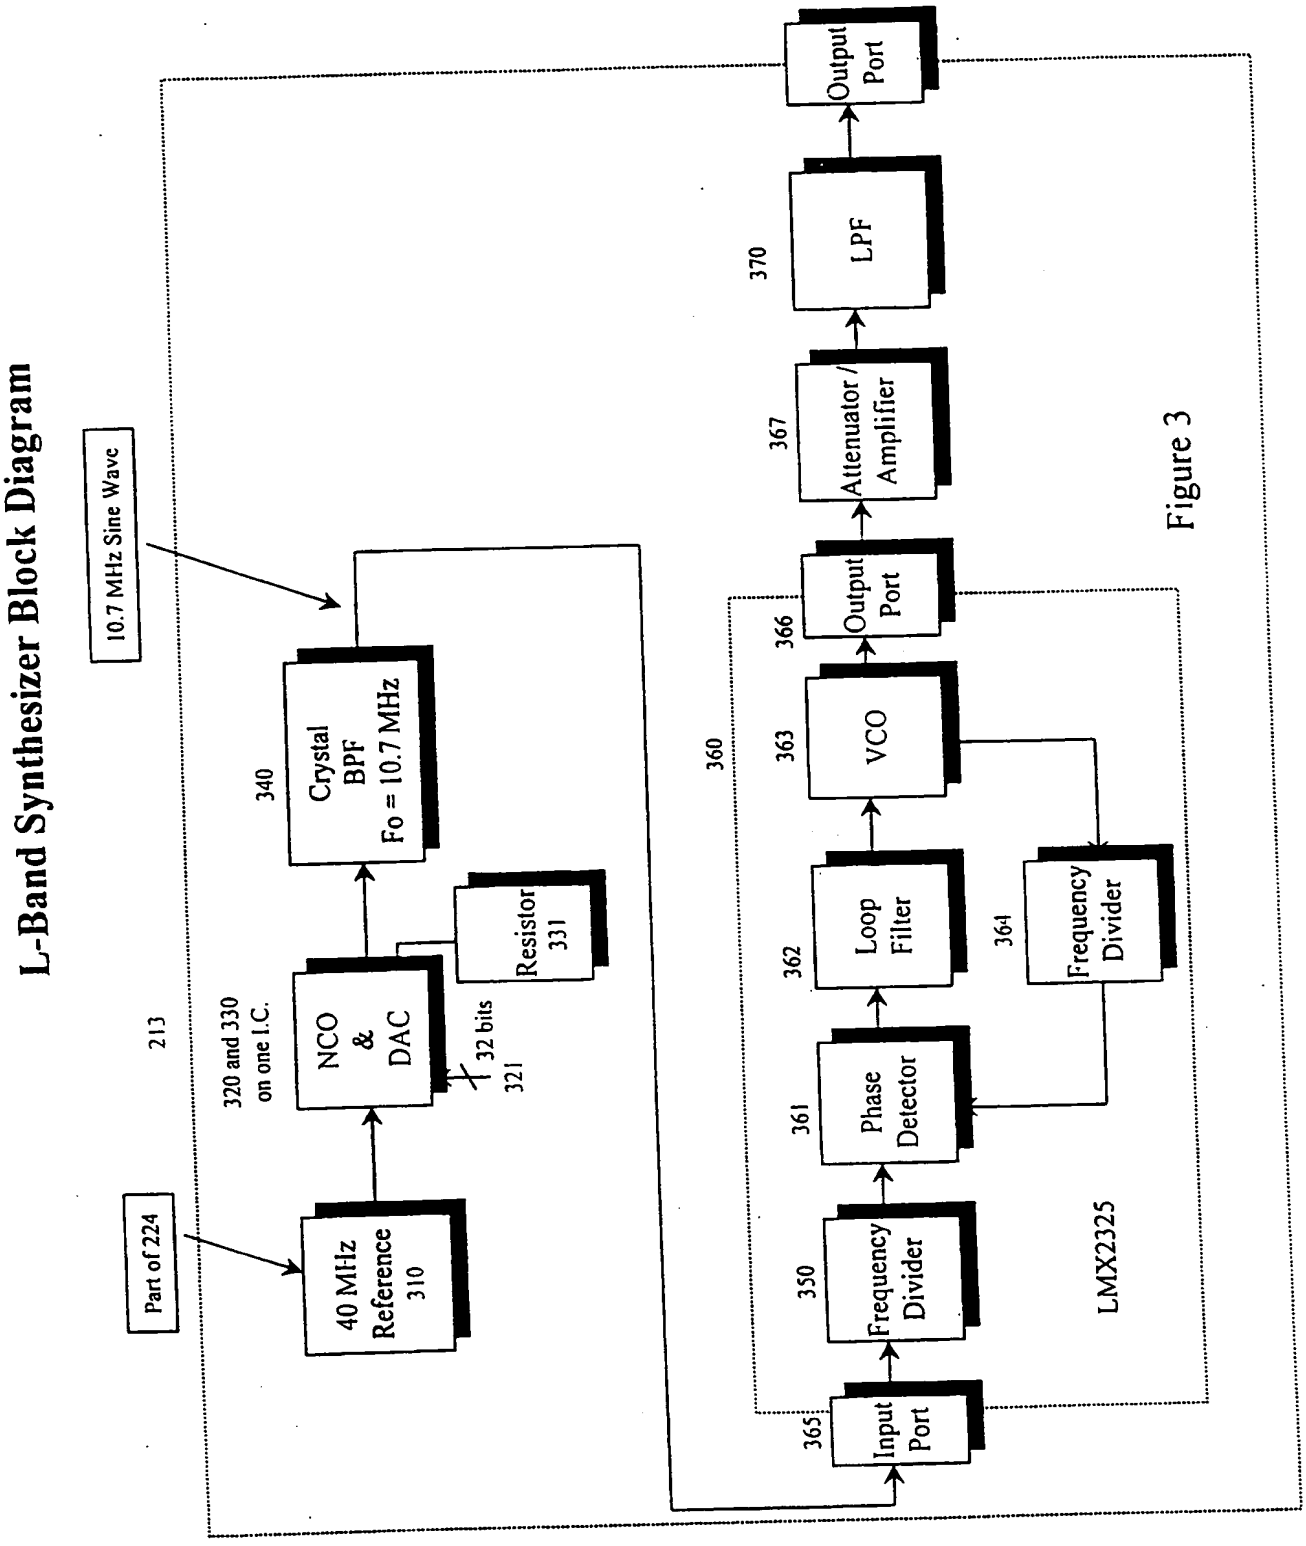
L-Band Synthesizer Block Diagram
10.7 MHz Sine Wave
Part of 224
213
320 and 330
on one I.C.
40 MHz
Reference
310
NCO
&
DAC
32 bits
321
Resistor
331
340
Crystal
BPF
Fo = 10.7 MHz
360
365
Input
Port
350
Frequency
Divider
361
Phase
Detector
362
Loop
Filter
363
VCO
366
Output
Port
364
Frequency
Divider
LMX2325
367
Attenuator /
Amplifier
370
LPF
Output
Port

Figure 3

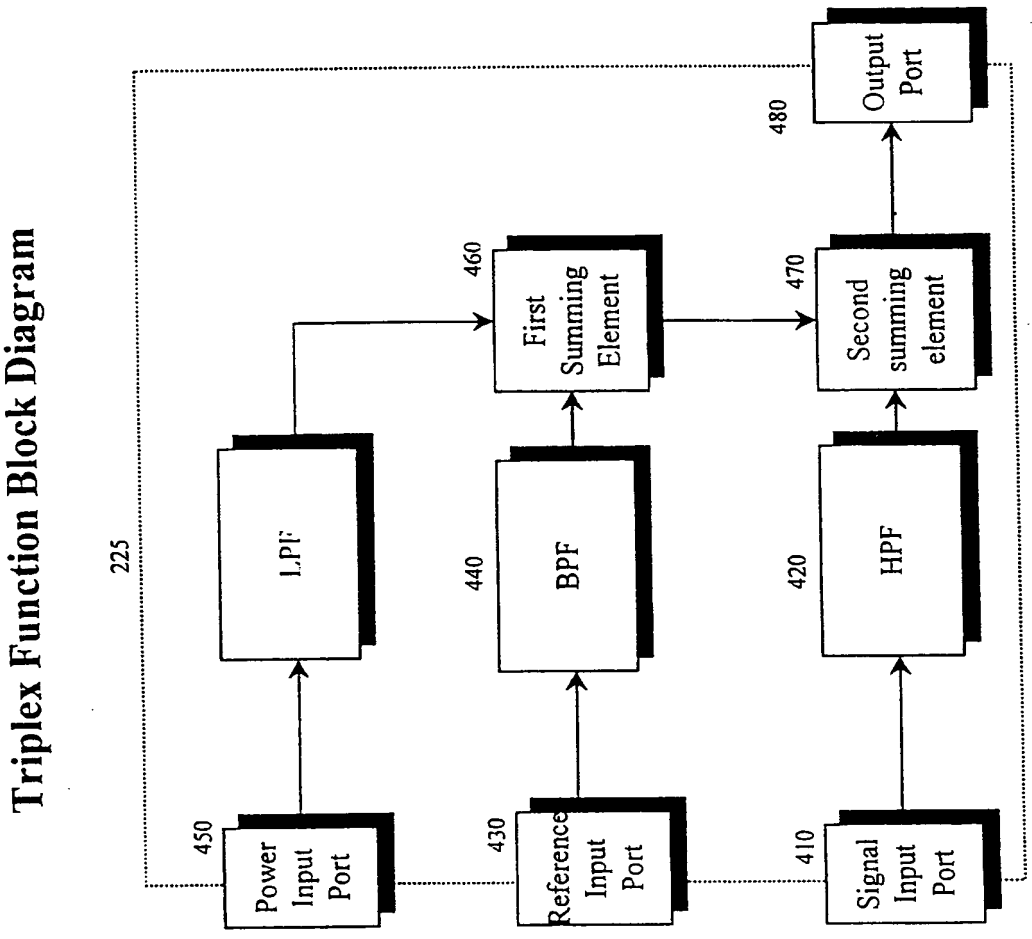
Triplex Function Block Diagram
225
450
Power Input Port
LPF
430
Reference Input Port
440
BPF
410
Signal Input Port
420
HPF
460
First Summing Element
470
Second summing element
480
Output Port

Figure 4

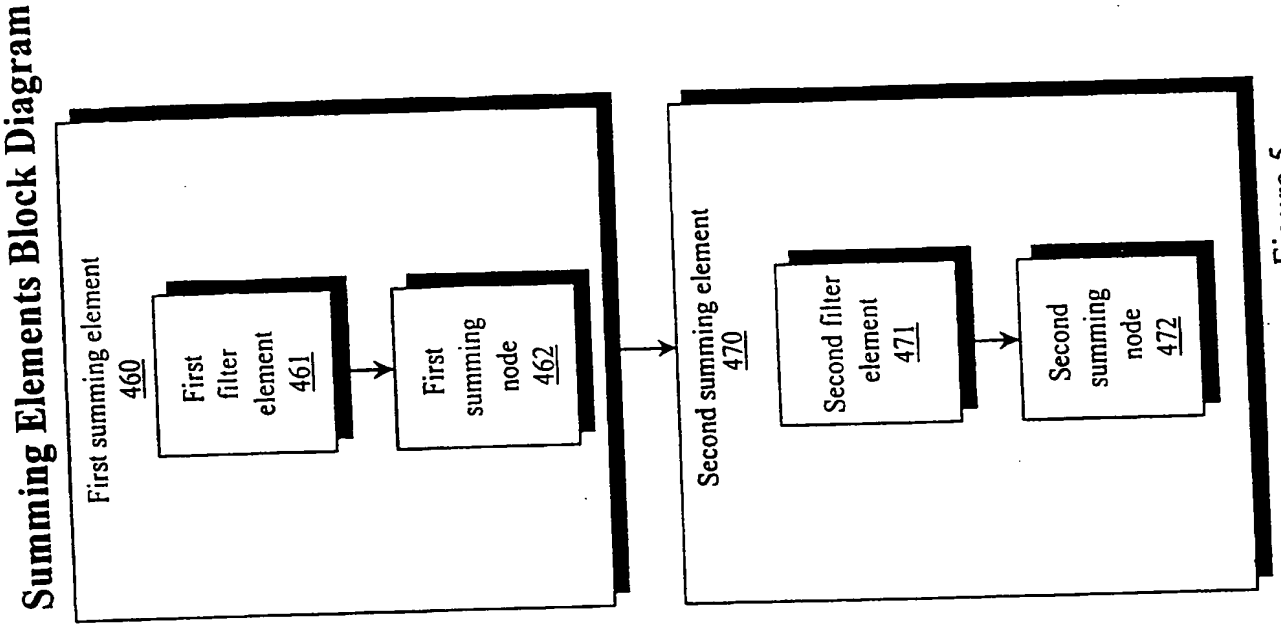
Summing Elements Block Diagram
First summing element
460
First filter element 461
First summing node 462
Second summing element
470
Second filter element 471
Second summing node 472

Figure 5

CORRECTED VERSION*

CORRECTED VERSION**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :
H04B 7/185

A3

(11) International Publication Number: WO 00/03494

(43) International Publication Date: 20 January 2000 (20.01.00)

(21) International Application Number: PCT/US99/15579

(22) International Filing Date: 9 July 1999 (09.07.99)

(30) Priority Data:
09/112,610 9 July 1998 (09.07.98) US

(71) Applicant: ACT WIRELESS [US/US]; Suite 14, 4710 East Elwood Street, Phoenix, AZ 85040 (US).

(72) Inventors: SCHUERMAN, Ken; 2581 West Erie Street, Chandler, AZ 85224 (US). MEISS, James; 4959 East Fellars Drive, Scottsdale, AZ 85254 (US). WEBBER, Mark; 3847 West Whitten Street, Chandler, AZ 85226 (US).

(74) Agent: SWERNOFSKY LAW GROUP; P.O. Box 390013, Mountain View, CA 94039-0013 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(88) Date of publication of the international search report:
13 July 2000 (13.07.00)

(54) Title: SATELLITE NETWORK TERMINAL

SL-512V, Hybrid Modem coupled to a BUC and LNB

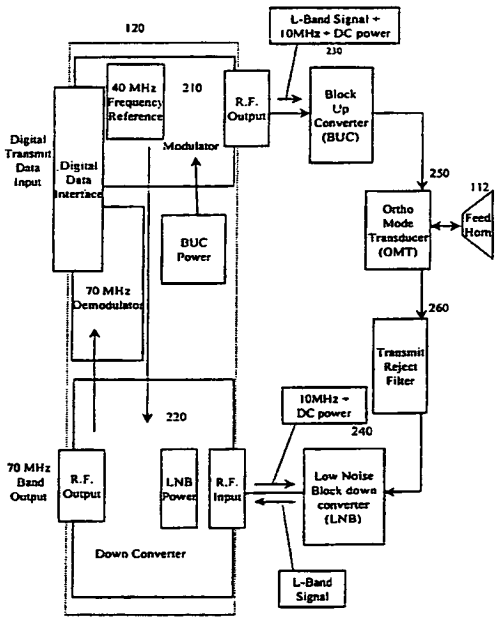

(57) Abstract

The invention provides a method and system for simplified signal processing between the feed horn assembly and the frame relay equipment. Data is directly modulated from the frame relay equipment onto an L-band carrier and block up-converted for output at the feed horn. Block up-conversion is aided by adding a DC power signal and a 10.0 megahertz frequency reference signal to the L-band modulated signal (so as to protect the frequency reference against variations due to external elements), while maintaining spectral purity of the L-band modulated signal.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

Inter. .onal Application No
PCT/US 99/15579

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04B7/185

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 16024 A (SKYDATA CORP) 16 April 1998 (1998-04-16) abstract page 10, line 8-23 page 11, line 4-15 page 13, line 5-36 page 15, line 5 -page 16, line 37 figures 1,2 claims	1,2,4
X	US 5 559 809 A (JEON SOON I ET AL) 24 September 1996 (1996-09-24) abstract column 1, line 9-60 column 2, line 10-34 column 2, line 66 -column 3, line 19 figures 1,2 claim 1	1,5,6

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
24 January 2000	08. 05. 2000

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Dejonghe, O

1

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Inter ...nal Application No
PCT/US 99/15579

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 820 159 A (GEN ELECTRIC) 21 January 1998 (1998-01-21) page 3, line 12-23 page 3, line 51-56 figure 1	1
A	US 5 774 788 A (HANNAH ROBERT ET AL) 30 June 1998 (1998-06-30) abstract column 2, line 25-34 column 2, line 42-58 column 3, line 42 -column 4, line 49 column 6, line 50 -column 7, line 20 column 7, line 31-48 figures 1,2,4 claims	1,3

1

INTERNATIONAL SEARCH REPORT

Inter onal application No.
PCT/US 99/ 15579

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-6, 8, 9

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

1. Claims: 1-6,8,9

   method for satellite communication

2. Claim : 7

   method for generating a frequency reference signal to a PLL for synthesizing an L-Band carrier signal

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter nal Application No
PCT/US 99/15579

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9816024 A	16-04-1998	US 5841765 A	24-11-1998
		AU 4750797 A	05-05-1998
US 5559809 A	24-09-1996	KR 9700660 B	16-01-1997
		JP 2840565 B	24-12-1998
		JP 8111658 A	30-04-1996
EP 0820159 A	21-01-1998	US 5734962 A	31-03-1998
		AU 2854497 A	29-01-1998
		BR 9704012 A	10-11-1998
		CA 2208413 A	17-01-1998
		CN 1173085 A	11-02-1998
		CZ 9702197 A	18-02-1998
		HU 9701215 A	30-03-1998
		JP 10135888 A	22-05-1998
		NO 973289 A	19-01-1998
		PL 321011 A	19-01-1998
US 5774788 A	30-06-1998	NONE	

CORRECTED VERSION*

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04B 7/00

A2

(11) International Publication Number: WO 00/03494

(43) International Publication Date: 20 January 2000 (20.01.00)

(21) International Application Number: PCT/US99/15579

(22) International Filing Date: 9 July 1999 (09.07.99)

(30) Priority Data:
09/112,610 9 July 1998 (09.07.98) US

(71) Applicant: ACT WIRELESS [US/US]; Suite 14, 4710 East Elwood Street, Phoenix, AZ 85040 (US).

(72) Inventors: SCHUERMAN, Ken; 2581 West Erie Street, Chandler, AZ 85224 (US). MEISS, James; 4959 East Fellars Drive, Scottsdale, AZ 85254 (US). WEBBER, Mark; 3847 West Whitten Street, Chandler, AZ 85226 (US).

(74) Agent: SWERNOFSKY LAW GROUP; P.O. Box 390013, Mountain View, CA 94039-0013 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
Without international search report and to be republished upon receipt of that report.

(54) Title: SATELLITE NETWORK TERMINAL

OMT / Tx Reject Filter / Feed Horn

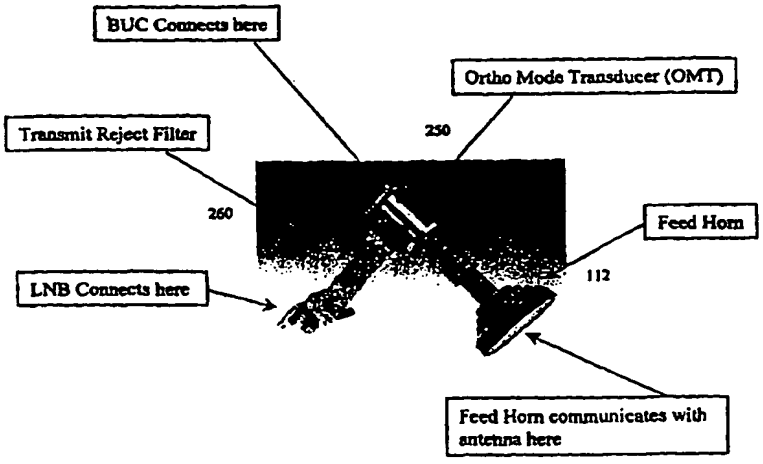

(57) Abstract

The invention provides a method and system for simplified signal processing between the feed horn assembly and the frame relay equipment. Data is directly modulated from the frame relay equipment onto an L-band carrier and block up-converted for output at the feed horn. Block up-conversion is aided by adding a DC power signal and a 10.0 megahertz frequency reference signal to the L-band modulated signal (so as to protect the frequency reference against variations due to external elements), while maintaining spectral purity of the L-band modulated signal.

*(Referred to in PCT Gazette No. 12/2000, Section II)

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		

CORRECTED VERSION*

CORRECTED VERSION**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04B 7/00

A2

(11) International Publication Number: WO 00/03494

(43) International Publication Date: 20 January 2000 (20.01.00)

(21) International Application Number: PCT/US99/15579

(22) International Filing Date: 9 July 1999 (09.07.99)

(30) Priority Data:
09/112,610 9 July 1998 (09.07.98) US

(71) Applicant: ACT WIRELESS [US/US]; Suite 14, 4710 East Elwood Street, Phoenix, AZ 85040 (US).

(72) Inventors: SCHUERMAN, Ken; 2581 West Erie Street, Chandler, AZ 85224 (US). MEISS, James; 4959 East Fellars Drive, Scottsdale, AZ 85254 (US). WEBBER, Mark; 3847 West Whitten Street, Chandler, AZ 85226 (US).

(74) Agent: SWERNOFSKY LAW GROUP; P.O. Box 390013, Mountain View, CA 94039-0013 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
Without international search report and to be republished upon receipt of that report.

(54) Title: SATELLITE NETWORK TERMINAL

OMT / Tx Reject Filter / Feed Horn

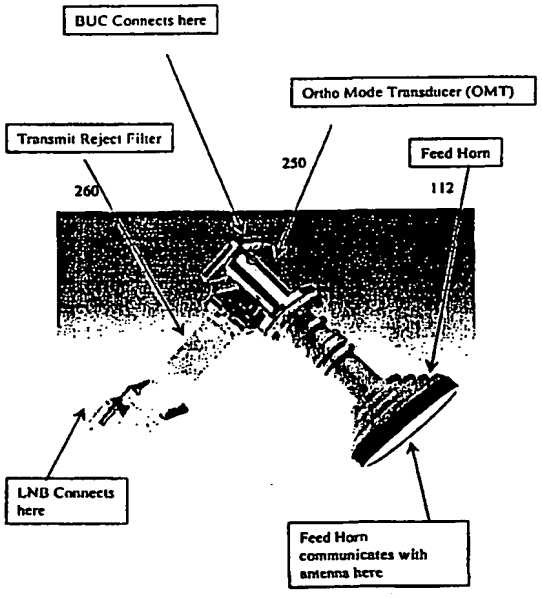

(57) Abstract

The invention provides a method and system for simplified signal processing between the feed horn assembly and the frame relay equipment. Data is directly modulated from the frame relay equipment onto an L-band carrier and block up-converted for output at the feed horn. Block up-conversion is aided by adding a DC power signal and a 10.0 megahertz frequency reference signal to the L-band modulated signal (so as to protect the frequency reference against variations due to external elements), while maintaining spectral purity of the L-band modulated signal.

*(Referred to in PCT Gazette No. 12/2000, Section II) **(Referred to in PCT Gazette No. 23/2000, Section II)

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		

Title of the Invention

Satellite Network Terminal

Background of the Invention

1. Field of the Invention

This invention relates to satellite network terminals.

2. Related Art

Signals received at a satellite network terminal are conventionally coupled from feed horn at a satellite dish antenna, to an antenna transceiver(i.e. outdoor unit), to a signal up/down converter, to a modulator/demodulator for interpretation and routing. For example, when the satellite network terminal is used in a frame relay network, the modulator/demodulator is coupled to frame relay network equipment such as a frame relay receiver-filter and a frame relay switch. The feed horn is located at or near the focus of a dish antenna for the satellite network terminal, and is coupled to the antenna transceiver using a cable.

In known systems, the feed horn at the satellite dish antenna is disposed to receive and output signals modulated on a carrier in a first known frequency range such as C-band (about 11.7 to about 12.2 gigahertz) or Ku-band (about 14 to about 14.5 gigahertz). The antenna transceiver is disposed to receive those signals and output signals modulated on a carrier in a second frequency range such as L-band (about 950 to about 1450 megahertz). The signal up/down converter is disposed to receive those signals and output signals modulated on a carrier in a third known frequency range (about 70 megahertz ± 18 megahertz, or alternatively about 140 megahertz ± 36 megahertz).

A first problem known in the art is that the antenna transceiver and up/down converter are complex and expensive; it would be desirable to be able to modulate and demodulate the satellite signal directly between the feed horn at the satellite dish antenna and the modulator/demodulator. This would reduce required signal filtering. It would also greatly simplify, and reduce the expense of, producing the transmitted satellite signal.

A second problem known in the art is that the feed horn at the satellite dish antenna is exposed to external elements, such as weather, heat and cold. The cable coupling the feed horn to the antenna transceiver must be relatively short, because there is a substantial amount of power loss for signals transmitted through that cable with a carrier frequency at or above about the 1 gigahertz frequency range. The relatively short cable limits design options for placement of the modulator/demodulator, particularly if the antenna transceiver and up/down converter have been eliminated in response to the first problem noted above.

Accordingly, it would be advantageous to provide for greatly simplified signal processing between the feed horn and the frame relay equipment. This advantage is achieved in an embodiment of the invention in which data is directly modulated from the frame relay equipment onto an L-band carrier and block up-converted for output at the feed horn.

Summary of the Invention

The invention provides a method and system for simplified signal processing between the feed horn and the frame relay equipment. Data is directly modulated from the frame relay equipment onto an L-band carrier and block up-converted for output at the feed horn. Block up-conversion is aided by adding a DC power signal and a 10 megahertz frequency reference signal to the L-band modulated signal (so as to protect the frequency reference against variations due to external elements), while maintaining spectral purity of the 10 megahertz frequency reference and the L-band modulated signal. Additionally, a frequency reference is generated in the modulator synthesizer circuit by a phase locked loop (PLL) circuit using a numerically controlled oscillator (NCO) as a reference signal and a crystal filter to band-pass filter the output at 10.7-megahertz. A noise floor for the NCO is set so that the output signal is clipped at the desired output frequency; this increases the signal/noise ratio at that desired output frequency.

Brief Description of the Drawings

Figure 1A shows a block diagram of a system for simplified signal processing between a satellite antenna and a set of frame relay equipment.

Figure 1B shows a diagram of a transmit reject filter, ortho mode transducer, and feed horn assembly.

Figure 2A shows a block diagram of a modulator and down converter coupled to a block up-converter.

Figure 2B shows a block diagram of a down converter including a commercial tuner module, a triplexer, a frequency reference, and a DC power supply.

Figure 2C shows a block diagram of a block up converter (BUC).

Figure 2D shows a block diagram of a low noise block down converter (LNB).

Figure 2E shows a block diagram of a modulator including a modulator element, a DC power supply, a frequency reference, and a triplexer.

Figure 3 shows a block diagram of the modulator synthesizer including the generation of an approximately 10.7 megahertz synthesizer frequency reference. This synthesizer generates the modulator L-Band carrier signal.

Figure 4 shows a triplex function element for combining an L-band modulated signal, a DC power signal, and a frequency reference signal.

Detailed Description of the Preferred Embodiment

In the following description, a preferred embodiment of the invention is described with regard to preferred process steps and data structures. Those skilled in the art would recognize after perusal of this application that embodiments of the invention can be implemented using circuits adapted to particular process steps and data structures described herein, and that implementation of the process steps and data structures described herein would not require undue experimentation or further invention.

Inventions described in this application can be used in conjunction with inventions described in the following patent documents:

- U.S. Application Serial No. 08/806,288, titled "Transmitting Multiplexed Frames on Communication Links", filed February 26, 1997, in the name of inventor Alain Gravel, assigned to ACT Networks, Inc., attorney docket number ANET-002; and

- U.S. Application Serial No. 08/911,473, titled "Flexible Voice Shelf", filed August 14, 1997, in the name of inventors Kannan Rangarajan, David G. Stanfield, and Dan G. Wilson, and assigned to ACT Networks, Inc., attorney docket number ANET-004.

Each of these documents is hereby incorporated by reference as if fully set forth herein.

System Elements

Figure 1A shows a block diagram of a system for simplified signal processing between a satellite antenna and a set of frame relay equipment.

A system 100 includes a satellite dish antenna 110, including a parabolic dish reflector 111 and a feed horn 112. The feed horn 112 is disposed to receive and to transmit signals at a first set of known satellite transmission frequencies, such as those in C-band or Ku-band. Feed horns 112 for use with satellite dish antennas 110 are known in the art of satellite communication. An exemplar of a feed horn assembly including the feed horn, the mounts for the BUC (block up converter), LNB (low-noise block converter) and the transmit reject filter and the OMT (ortho mode transducer) is shown in Figure 1B.

In a preferred embodiment the feed horn 112 is coupled to an antenna transceiver 113, which is disposed to couple signals to and from the feed horn 112 at a second set of known frequencies, such as those in L-band. Note that in a conventional assembly the outdoor unit or antenna transceiver includes everything except the feed horn (i.e. the BUC, LNB, OMT and the transmit or Tx reject filter).

The antenna transceiver 113 is coupled to a modulator and down converter 120, which is disposed to couple signals to and from the antenna transceiver 113 at L-band frequencies.

The modulator and down converter 120 is coupled to a set of frame relay network equipment 130, which is disposed to transmit, receive and filter, and switch frames in a frame relay system.

In a preferred embodiment, the frame relay network equipment 130 includes the Skyframe™ 800-EM product, available from ACT Networks, Inc., of Camarillo, California. The Skyframe™ 800-EM product preferably includes a plurality of digital frame receiver/filters, such as the Skyframe™ DEF-01 product, also available from ACT Networks, Inc., of Camarillo, California, and at least one modulator/demodulator card, such as the Skyframe™ MOS-01-EM product, also available from ACT Networks, Inc., of Camarillo, California.

The modulator and down converter 120 is disposed to receive signals modulated on L-band frequencies, and to down convert those signals to a 70-megahertz carrier, to provide signals in the 70 megahertz ± 18 megahertz frequency range. Operation of the modulator and down converter 120 in this regard is further described with reference to figures 2A and 2B.

The modulator and down converter 120 is also disposed to receive digital data from the frame relay network equipment 130, and to directly modulate that data onto L-band frequencies. Optionally, a 70 megahertz demodulator is included in the modulator and down converter unit. This minimizes cost and is ideal for remotely located sites. Additionally including the 70 megahertz demodulator with the modulator down converter unit frees a slot in the frame relay equipment for other hardware. Operation of the modulator and down converter 120 in this regard is further described with reference to figure 2A and figure 2B.

Modulator and Down Converter

Figure 2A shows a block diagram of a modulator and down converter coupled to a block up-converter.

The modulator and down converter 120 includes a modulator 210 and a down converter 220.

Referring to figures 1A and 2A, the modulator 210 (L-band modulator) is coupled to the frame relay network equipment 130 so as to receive digital data therefrom. The modulator 210 is also coupled to a BUC (block up converter) 230, so as to transmit signals on L-band frequencies for transmission by the satellite dish antenna 110.

The down converter 220 is coupled to the frame relay network equipment 130 so as to transmit signals thereto using a 70-megahertz carrier. The down converter 220 is also coupled to an LNB (low-noise block converter) 240, so as to receive signals on L-band frequencies for down conversion. Optionally, the demodulator 200 is coupled to the frame relay equipment 130 to transmit digital data thereto. Additionally, the demodulator 200 is coupled to the down converter 220 to receive signals using a 70 megahertz carrier as shown in Figure 2A. Figure 2B shows a block diagram of the elements of the down converter 220.

As shown in Figure 2A the BUC 230 is coupled to an OMT (ortho mode transducer) 250, so as to transmit signals to the feed horn 112. Figure 2C shows a block diagram of the elements of the block up converter (BUC).

As shown in Figure 2A the LNB 240 is coupled to a transmit-reject element 260, which is coupled to the OMT 250, so as to receive signals from the feed horn 112. The transmit-reject element 260 is disposed to filter out frequency components of signals transmitted by the BUC 230 to the OMT 250, and to transmit signals received by the feed horn 112 to the LNB 240 for processing. Operation of transmit-reject elements 260 is known in the art of satellite communication.

The OMT 250 is coupled to the feed horn 112, so as to transmit and receive signals to and from the feed horn 112. Coupling between the OMT 250 and the feed horn 112 is known in the art of satellite communication.

As shown in Figure 2E the modulator 210 includes an input port 211, a modulator element 212 coupled to the input port 211, a DC power supply 223, a frequency reference 224, a triplex function element 225, and an output port 226.

The input port 211 is coupled to the frame relay network equipment 130, and is coupled to the modulator element 212. The modulator element 212 modulates incoming digital data from the frame relay network equipment 130 onto an L-band carrier frequency, to provide a modulated signal in the L-band frequency range. The modulator element 212 is coupled to the triplex function element 225.

The modulator element 212 includes an L-band reference frequency synthesizer element 213 and a quadrature modulator element 214. The modulator element 212 processes the incoming digital data from the frame relay network equipment 130 , generates two quadrature signals (that is, I and Q data streams) and modulates those I and Q data streams onto the L-band reference frequency carrier in quadrature. In a preferred embodiment, the quadrature modulator element 214 includes an RF2422 circuit, available from R.F. Microdevices, of Greensboro, NC. Quadrature modulation is known in the art of signal processing.

The DC power supply 223 provides a constant DC power signal, and is coupled to the triplex function element 225.

The frequency reference 224 provides a constant 10.0 megahertz reference sine wave, and is coupled to the triplex function element 225.

The triplex function element 225 combines the output of the modulator element 212, the DC power supply 223, and the frequency reference 224, and provides a combined signal output at the output port 226. Operation of the triplex function element 225 is further described with reference to figure 4.

The BUC 230 includes a signal separator element 231, a carrier synthesizer element 232, a mixer 233, and an amplifier 234. The signal separator element 231 is disposed for coupling to the modulator element 212, using a high-quality signal transmission cable to prevent signal degradation. The signal separator element 231 isolates the 10.0 megahertz reference sine wave and provides that reference frequency to the carrier synthesizer element 232. The signal separator element 231 isolates the DC power and provides that power as required throughout the BUC 230.

The carrier synthesizer element 232 is coupled to the 10.0-megahertz reference sine wave and provides an output carrier signal to the mixer 233. In a preferred embodiment, the output carrier signal is about 13.05 gigahertz (for Ku-band). Carrier synthesizers are known in the art of signal processing.

The signal separator element 231 also isolates the L-band modulated digital data and provides that signal to the mixer 233. The mixer 233 translates the L-Band modulated carrier to a Ku-band carrier frequency for transmission. Mixers are known in the art of signal processing.

The amplifier 234 is coupled to the mixer 233, to receive the modulated Ku-band signal and to amplify it by about 50 decibels, for coupling to the feed horn 112 and transmission by the satellite dish antenna 110. Amplifiers are known in the art of signal processing.

Modulating Digital Data onto an L-Band Carrier

Figure 3 shows a means for providing a numerically controlled 10.7-megahertz ± 7.5 kilohertz reference sine wave. This sine wave is used as the reference input to a single loop synthesizer 360

The frequency reference 224 includes a first frequency reference 310 (part of 224), an NCO (numerically controlled oscillator) 320 and a DAC (digital to analog converter) 330, a band-pass filter 340, a frequency divider 350, a PLL (phase locked loop) 360, and a low-pass filter 370, coupled as shown in the figure. The PLL 360 includes a phase detector 361, a loop filter 362, a VCO (voltage controlled oscillator) 363, and a programmable frequency divider 364, coupled in a feedback configuration as shown in the figure.

The first frequency reference 310 includes a 40-megahertz sine wave signal. In a preferred embodiment, a temperature controlled quartz crystal oscillator generates this signal. Crystal oscillators are known in the art of signal processing.

The NCO 320 is coupled to an output of the first frequency reference 310, and includes a digital input port 321, so as to receive a 32-bit digital value specifying the fre-

quency multiplier the NCO 320 applies to its input. The frequency multiplier is less than one, so that the output signal from the NCO 320 and the DAC 330 comprises a 10.7-megahertz sine wave.

In a preferred embodiment, the NCO 320 and the DAC 330 are embodied in a single circuit, such as the AD9830 product, available from Analog Devices Corporation of Norwood MA. Numerically controlled oscillators and digital to analog converters are known in the art of signal processing.

The DAC 330 is coupled to an output of the NCO 320, and is disposed to convert a digital signal output from the NCO 320 to an analog signal. The DAC 330 includes a resistor 331 coupled to adjust the output level of the DAC 330. In a preferred embodiment, the resistor 331 is set so as to cause the 10.7-megahertz component of the output signal to clip at the maximum amplitude reachable by the DAC 330. This causes the signal-to-noise ratio of the DAC 330 to be maximized for the 10.7-megahertz component of the output signal.

The band-pass filter 340 is coupled to an output of the DAC 330. The band-pass filter 340 has a center frequency of 10.7-megahertz and a 3-decibel roll-off loss for a $\pm$ 7.5 kilohertz of difference from that center frequency. The design of band-pass filters is known in the art of signal processing, as is the design of band-pass filters with selected roll-off loss. Thus, the band-pass filter 340 imposes about an 80-decibel loss for frequencies greater than $\pm$ 40 kilohertz deviation from the nominal 10.7 megahertz NCO output frequency.

The frequency divider 350 is coupled to an output of the band-pass filter 340. The frequency divider 350 divides the signal output by the band-pass filter 340 (intended to be a substantially pure sine wave at about 10.7 megahertz) by 12, to generate a square wave 890 kilohertz signal.

The PLL 360 includes a digital input port 365 and an output port 366. The PLL 360 includes the phase detector 361, the loop filter 362, the VCO 363, and the programmable frequency divider 364, coupled in a feedback configuration. The digital input port 365 receives a digital value specifying the frequency divider the PLL 360 applies to its input signal. The programmable frequency divider 364 is responsive to the input signal so as to divide

a signal appearing at the output port 366 and couple a resultant to the phase detector 361. The output port 366 provides the output of the PLL 360. Phase-locked loops are known in the art of signal processing.

The attenuator / amplifier is coupled to the output port 366 of the PLL. The attenuator / amplifier combination is coupled to the low pass filter 370. The attenuator / amplifier provides greater than 55 decibels of isolation between the modulator 214 and the synthesizer VCO 363. Without this isolation, digital data signals present in the modulator 214 would feed backwards into the VCO 363 corrupting its spectral purity and seriously degrading the integrity of the modulator output signal. When an input digital data signal is modulated onto the carrier in quadrature (that is, having I and Q components), the signal output from the PLL 360 includes extraneous components at two times the desired output frequency. The low-pass filter 370 removes these extraneous components.

Triplex Function Element

Figure 4 shows a triplex function element for combining an L-band modulated signal, a DC power signal, and a frequency reference signal.

The triplex function element 225 includes a signal input port 410, a high-pass filter 420, a reference input port 430, a band-pass filter 440, a power input port 450, a low pass filter, a first summing element 460, a second summing element 470, and an output port 480.

The signal input port 410 is disposed for coupling to an incoming L-band signal, which includes digital data that has been modulated onto a carrier in the L-band frequency range of about 950 megahertz to about 1450 megahertz. The signal input port 410 is coupled to the high-pass filter 420, which prevents frequency components of the other two inputs 430 and 450 from feeding back into the L-Band signal path.

The reference input port 430 is disposed for coupling to an incoming reference signal at 10.0 megahertz. The reference input port 430 is coupled to the band-pass filter 440, which removes frequency components other than the desired reference frequency component

at 10.0 megahertz, and prevents frequency components from the other two inputs 410 and 450 from feeding back into the 10.0 megahertz signal path.

The power input port 450 is disposed for coupling to DC power signal, for example +24 V. The power input port is coupled to the low pass filter which remove unwanted frequency components from the power input signal. The band-pass filter 440 and low pass filter are coupled to the first summing element 460, which includes a set of first filter elements 461 and a first summing node 462, to sum the reference frequency component at 10.0 megahertz with the DC power signal. The high-pass filter 420 and the summing element 460 are coupled to the second summing element 470, which includes a set of second filter elements 471 and a second summing node 472, to sum the L-band modulated digital data with the signal provided by the first summing element 460.

The second summing element 470 is coupled to the output port 480, to provide an output which is the sum of the three inputs: (1) the L-band modulated digital data, (2) the 10.0 megahertz reference frequency component, and (3) the DC power signal.

Alternative Embodiments

Although preferred embodiments are disclosed herein, many variations are possible which remain within the concept, scope, and spirit of the invention, and these variations would become clear to those skilled in the art after perusal of this application.

Claims

1. A method for satellite communication, including steps for

receiving digital data from digital communications equipment and directly modulating said digital data onto a first carrier signal to provide a first modulated signal, and up-converting said first modulated signal for output at a satellite terminal;

receiving modulated satellite signals at said satellite terminal, down-converting said modulated satellite signals, providing said down converted modulated satellite signals to said digital communications equipment for demodulation, and demodulating down-converted satellite signals for output to said digital communications equipment.

2. A method as in claim 1, wherein said digital communications equipment includes a frame relay.

3. A method as in claim 1, wherein said first carrier signal includes an L-band carrier frequency.

4. A method as in claim 1, wherein said down-converted satellite signals are demodulated by a 70 MHz demodulator before said step of providing said down-converted satellite signals to said digital communications equipment.

5. A method as in claim 1, wherein said steps for up-converting include steps for combining said first modulated signal with a power signal prior to up-converting, while maintaining spectral purity of said first modulated signal.

6. A method as in claim 1, wherein said steps for up-converting include steps for combining said first modulated signal with a frequency reference signal prior to up-converting, while maintaining spectral purity of the reference signal and said first modulated signal.

7. A method for generating a frequency reference signal to a PLL for synthesizing an L-Band carrier signal that includes steps for

providing a first reference signal to a numerically controlled oscillator;

providing an output of said numerically controlled oscillator to a digital to analog converter; providing an output of said digital to analog converter to a crystal band pass filter; and

providing an output of said band-pass filter to a phase-locked loop.

8. A method as in claim 5, including steps for setting a noise floor for said digital to analog converter so said output of said digital to analog converter clips at a selected output level for said frequency reference signal.

9. A method as in claim 5, including steps for setting a noise floor for said digital to analog converter so said output of said digital to analog converter has a maximum signal to noise ratio at a selected output frequency for said frequency reference signal.

OMT / Tx Reject Filter / Feed Horn

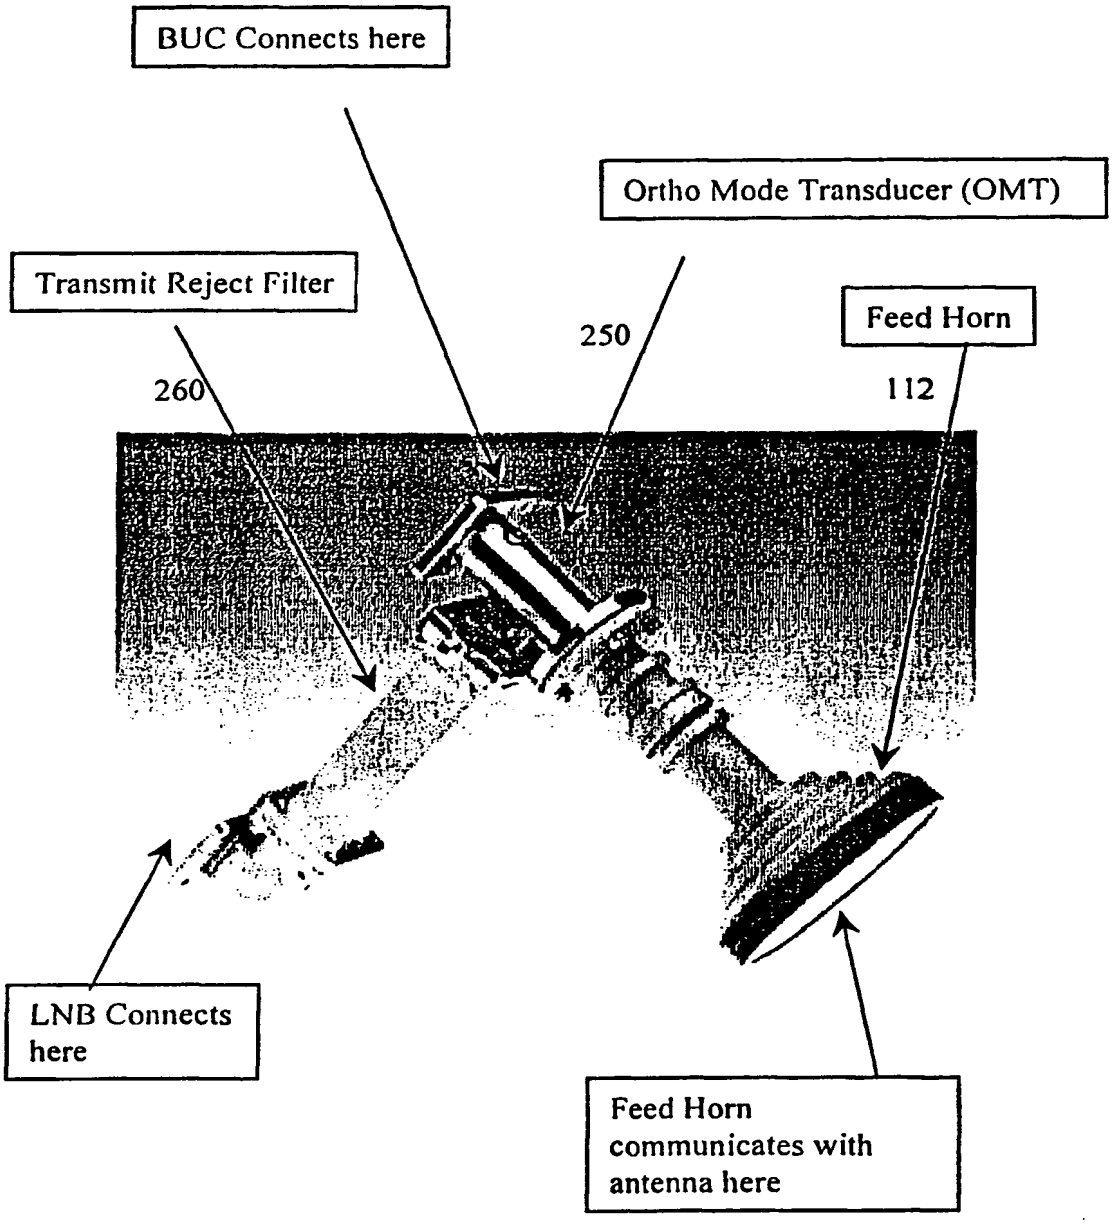

Figure 1B

SL-512V, Hybrid Modem coupled to a BUC and LNB

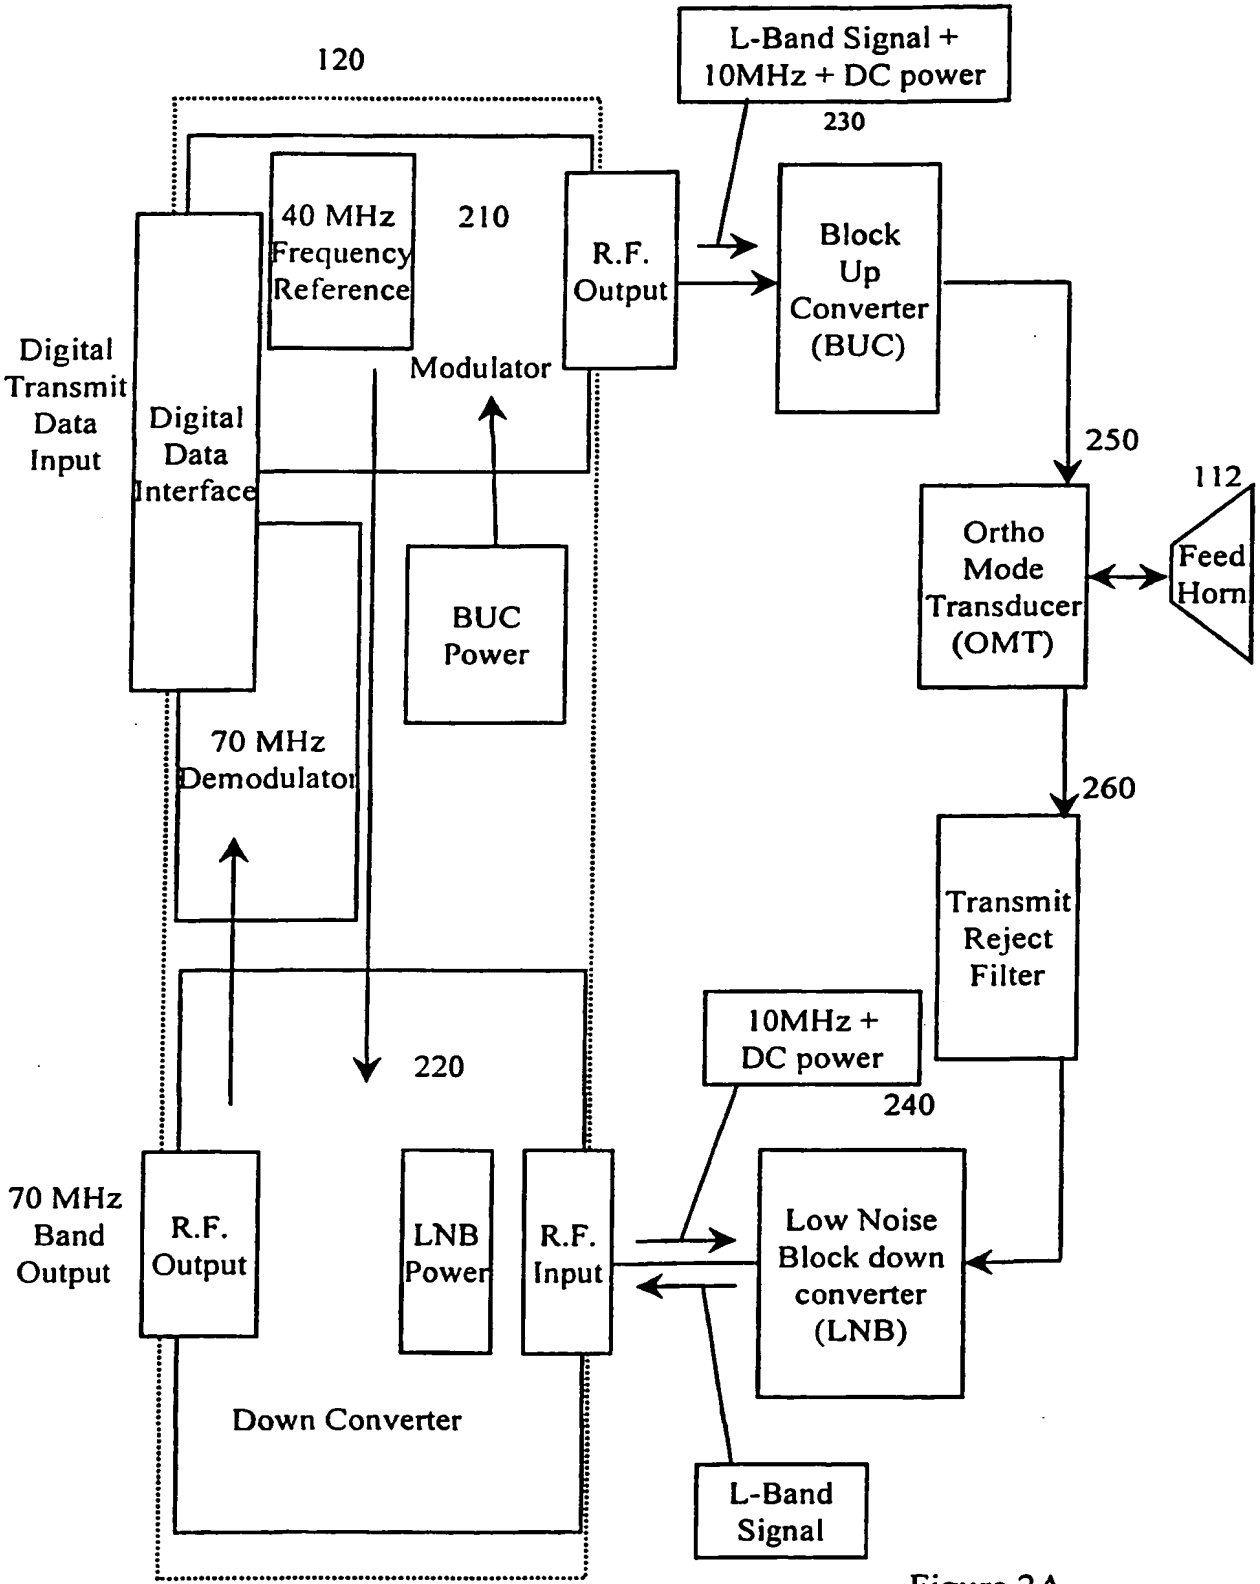

Figure 2A

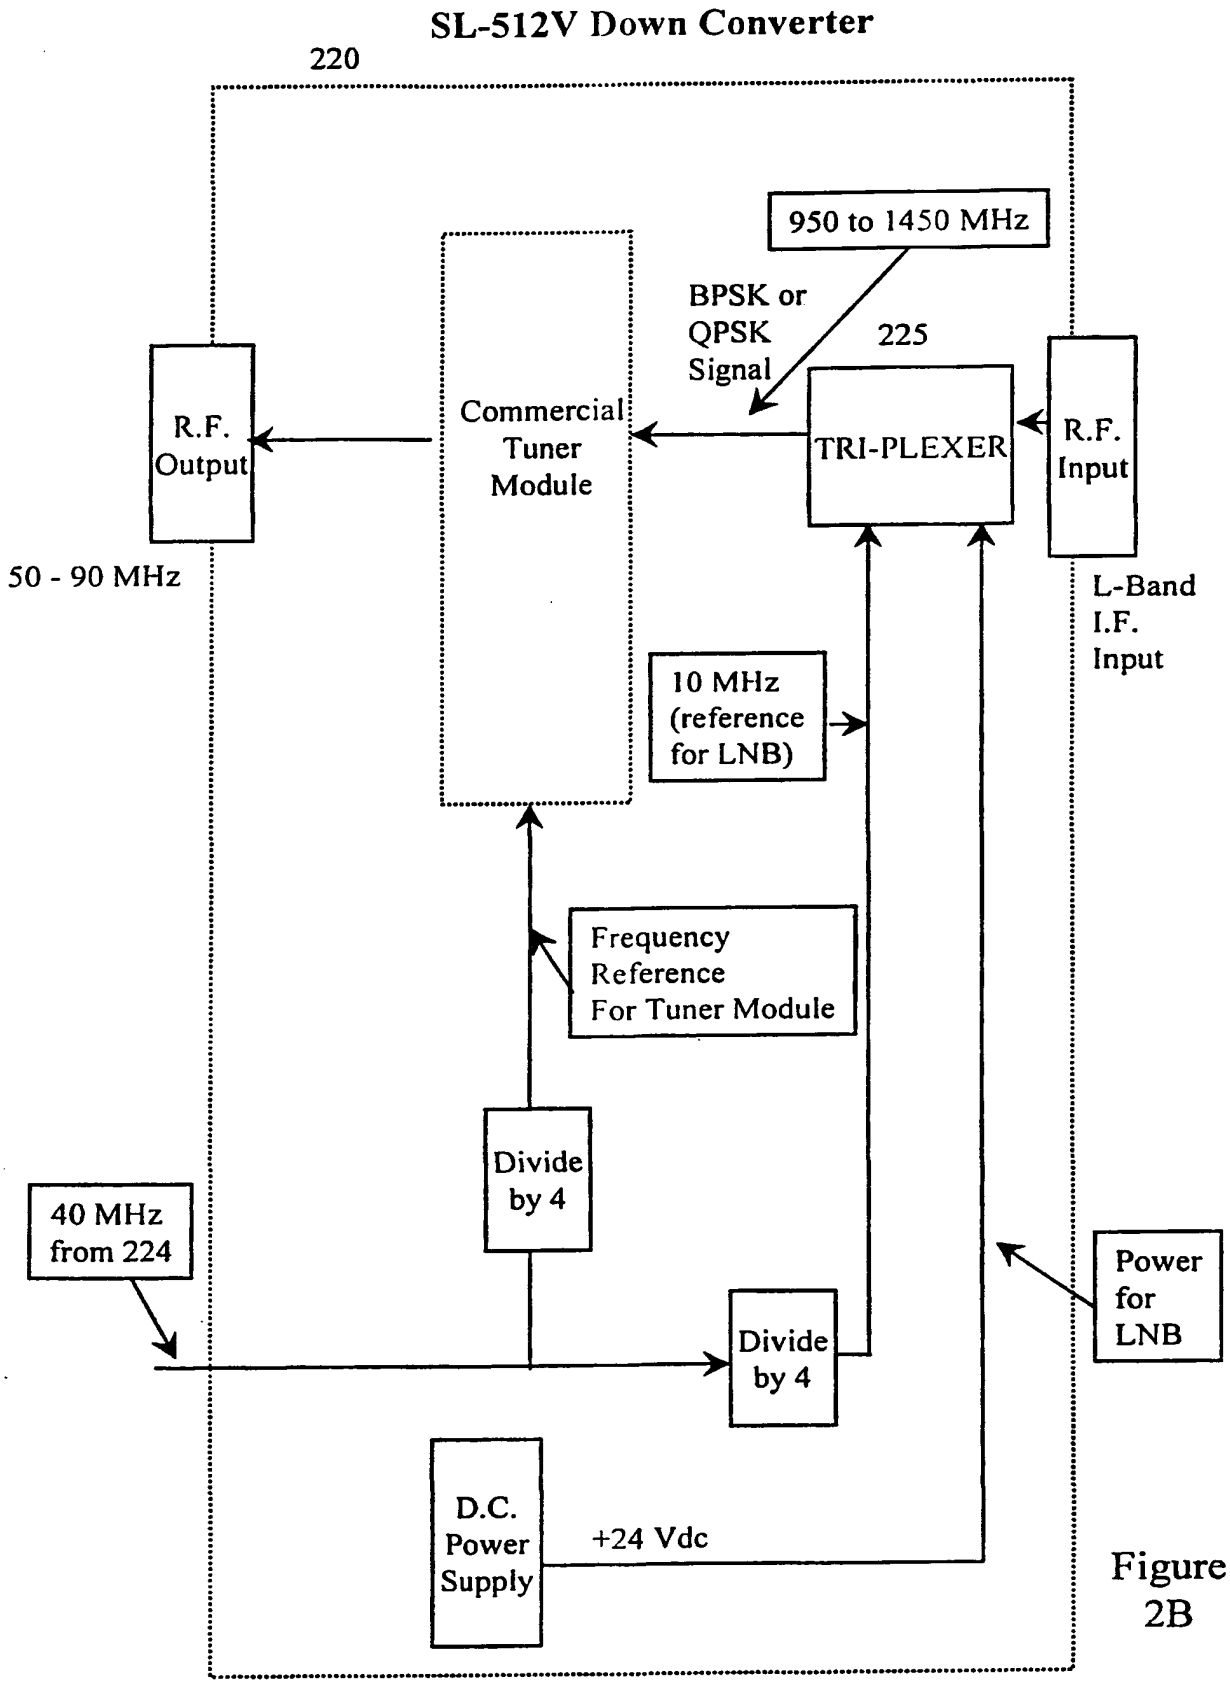
SL-512V Down Converter
220
950 to 1450 MHz
BPSK or
QPSK
Signal
225
R.F.
Output
Commercial
Tuner
Module
TRI-PLEXER
R.F.
Input
50 - 90 MHz
L-Band
I.F.
Input
10 MHz
(reference
for LNB)
Frequency
Reference
For Tuner Module
Divide
by 4
40 MHz
from 224
Divide
by 4
Power
for
LNB
D.C.
Power
Supply
+24 Vdc

Figure 2B

Block Up Converter (BUC)

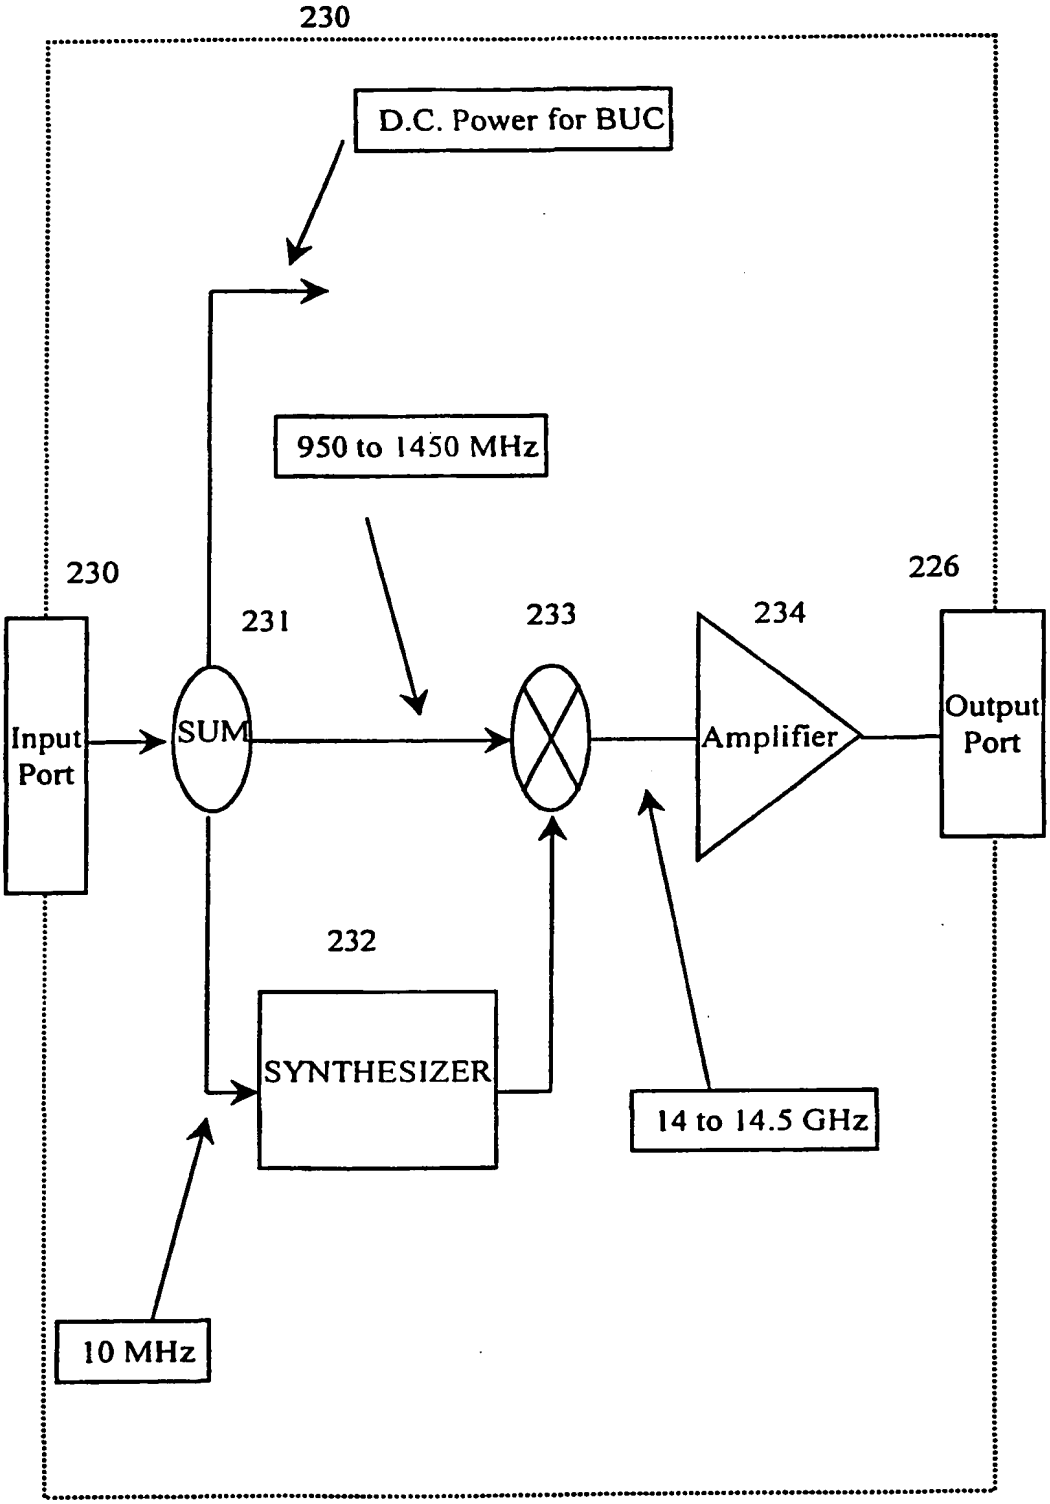

Figure 2C

Low Noise Block down converter (LNB)

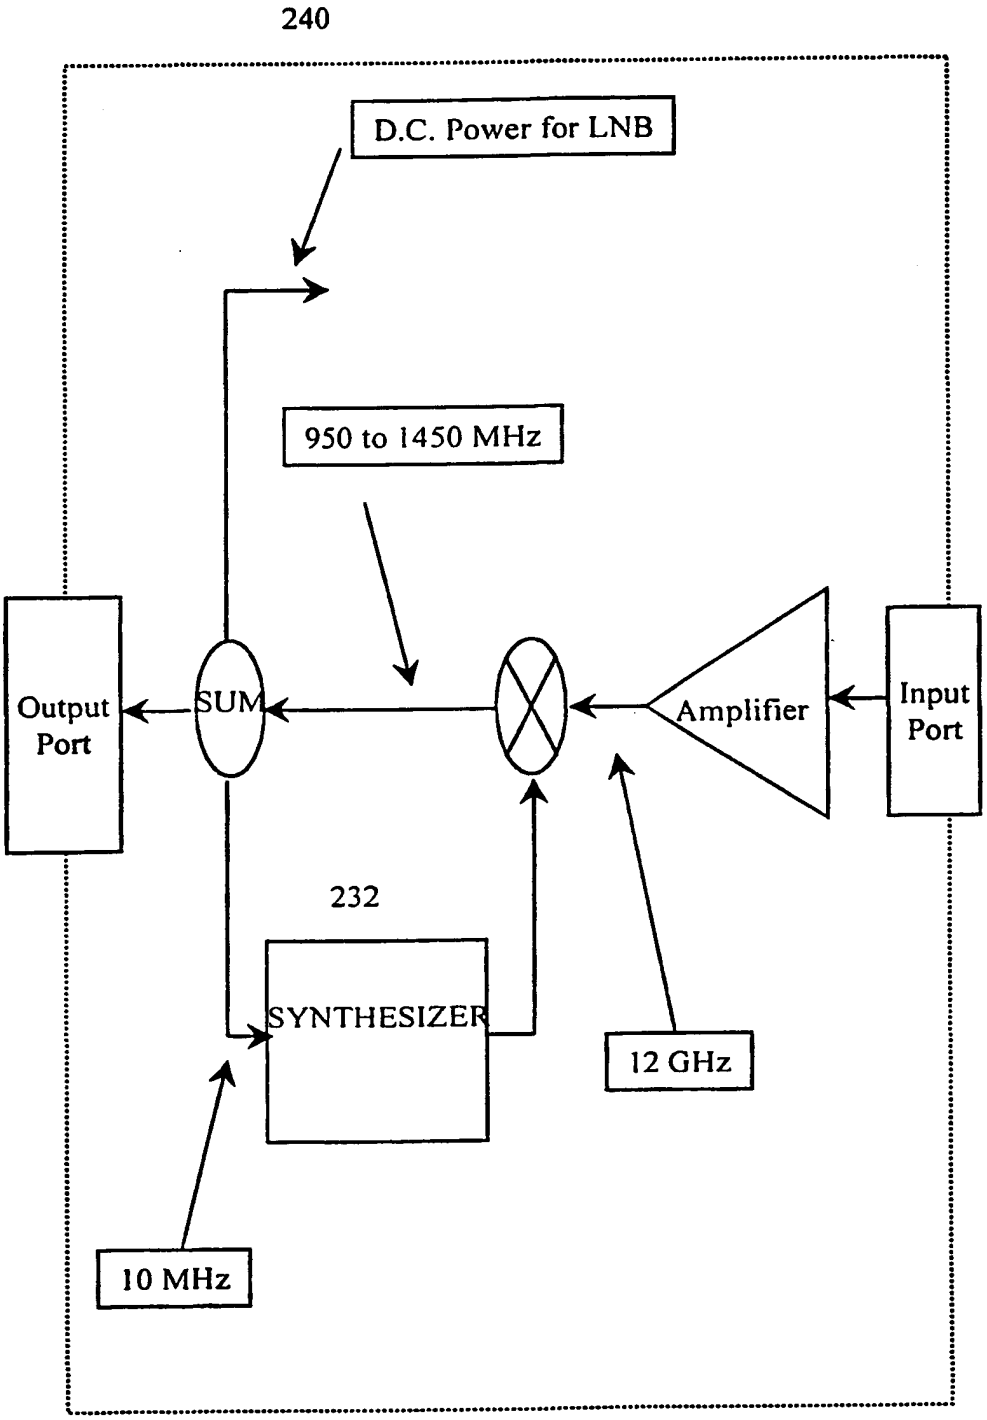

Figure 2D

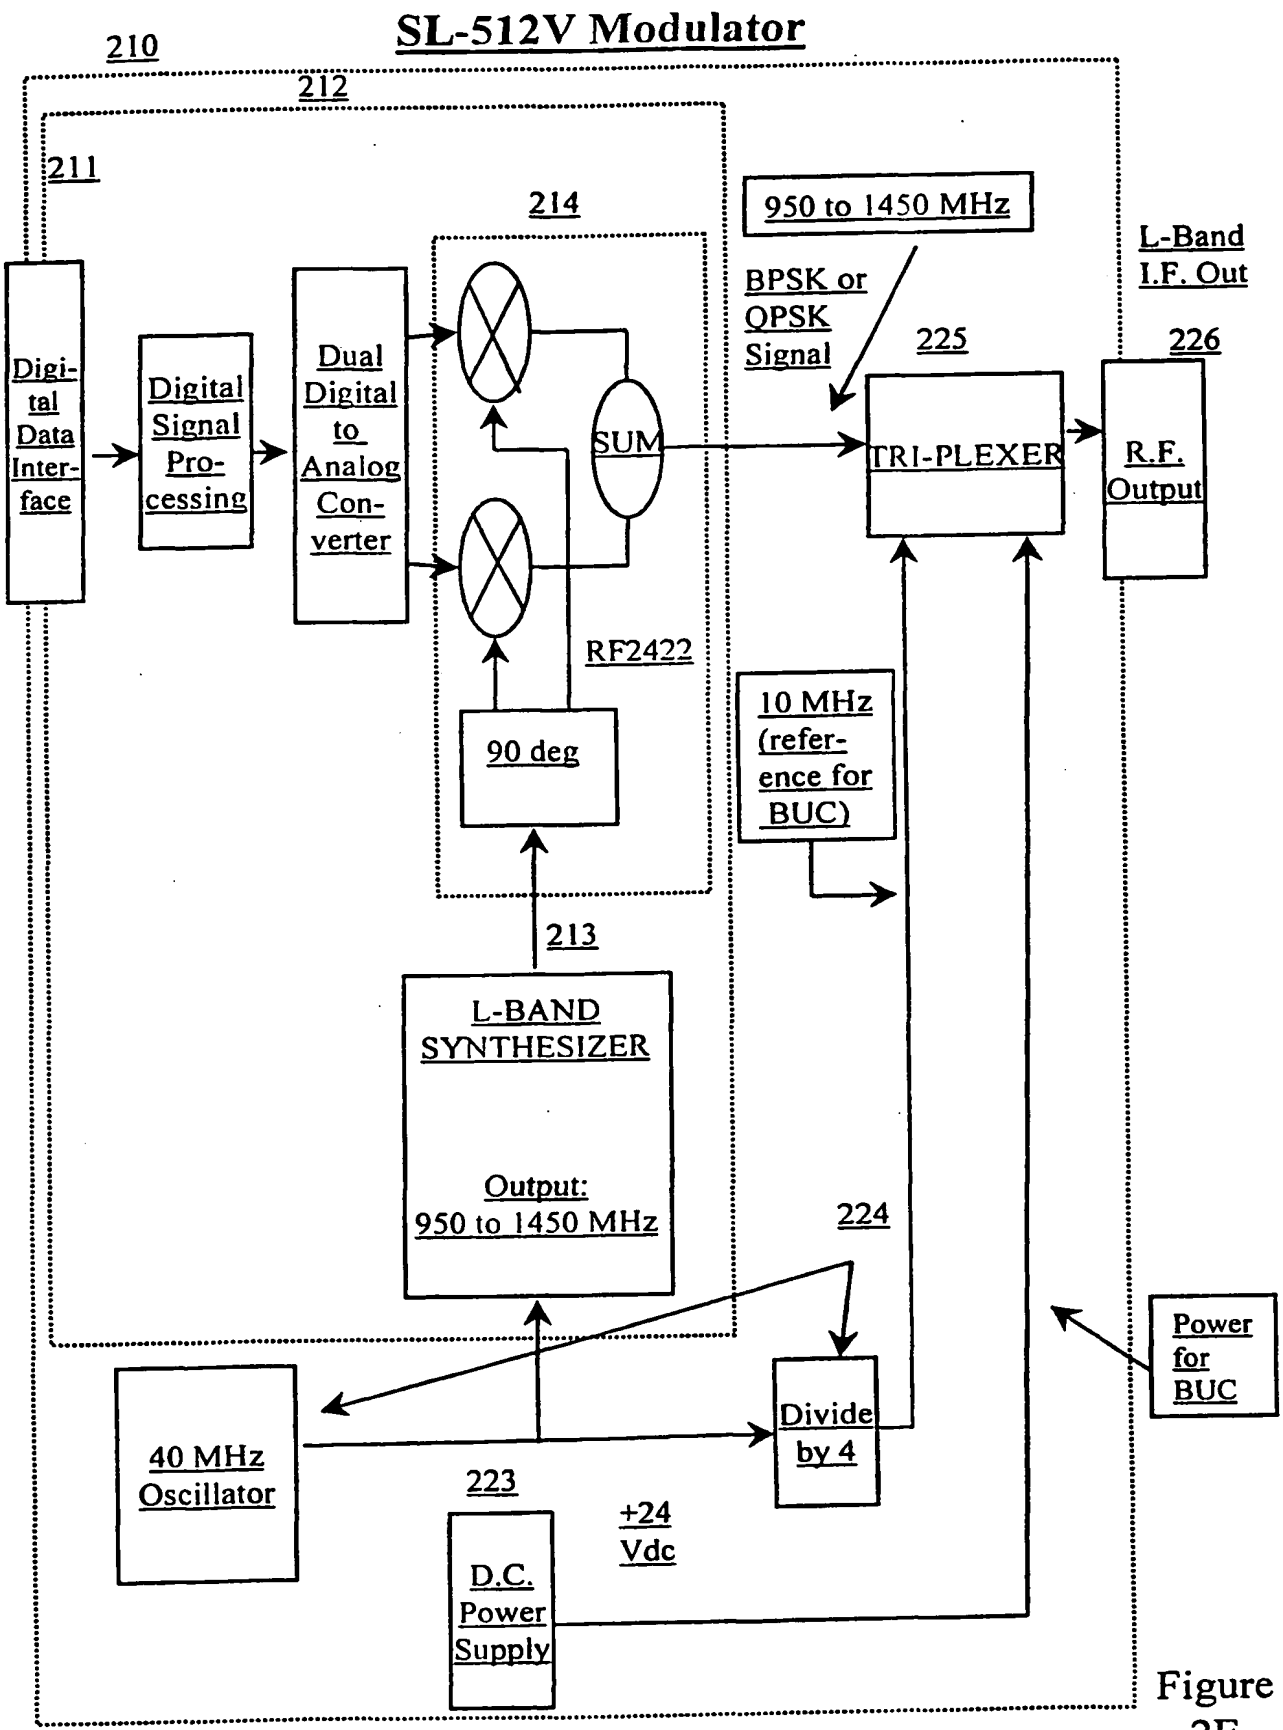
SL-512V Modulator
210
212
211
214
950 to 1450 MHz
L-Band I.F. Out
BPSK or QPSK Signal
225
226
Digi-tal Data Inter-face
Digital Signal Pro-cessing
Dual Digital to Analog Con-verter
SUM
TRI-PLEXER
R.F. Output
RF2422
90 deg
10 MHz (refer-ence for BUC)
213
L-BAND SYNTHESIZER
Output: 950 to 1450 MHz
224
Power for BUC
40 MHz Oscillator
Divide by 4
223
+24 Vdc
D.C. Power Supply

Figure 2E

L-Band Synthesizer Block Diagram

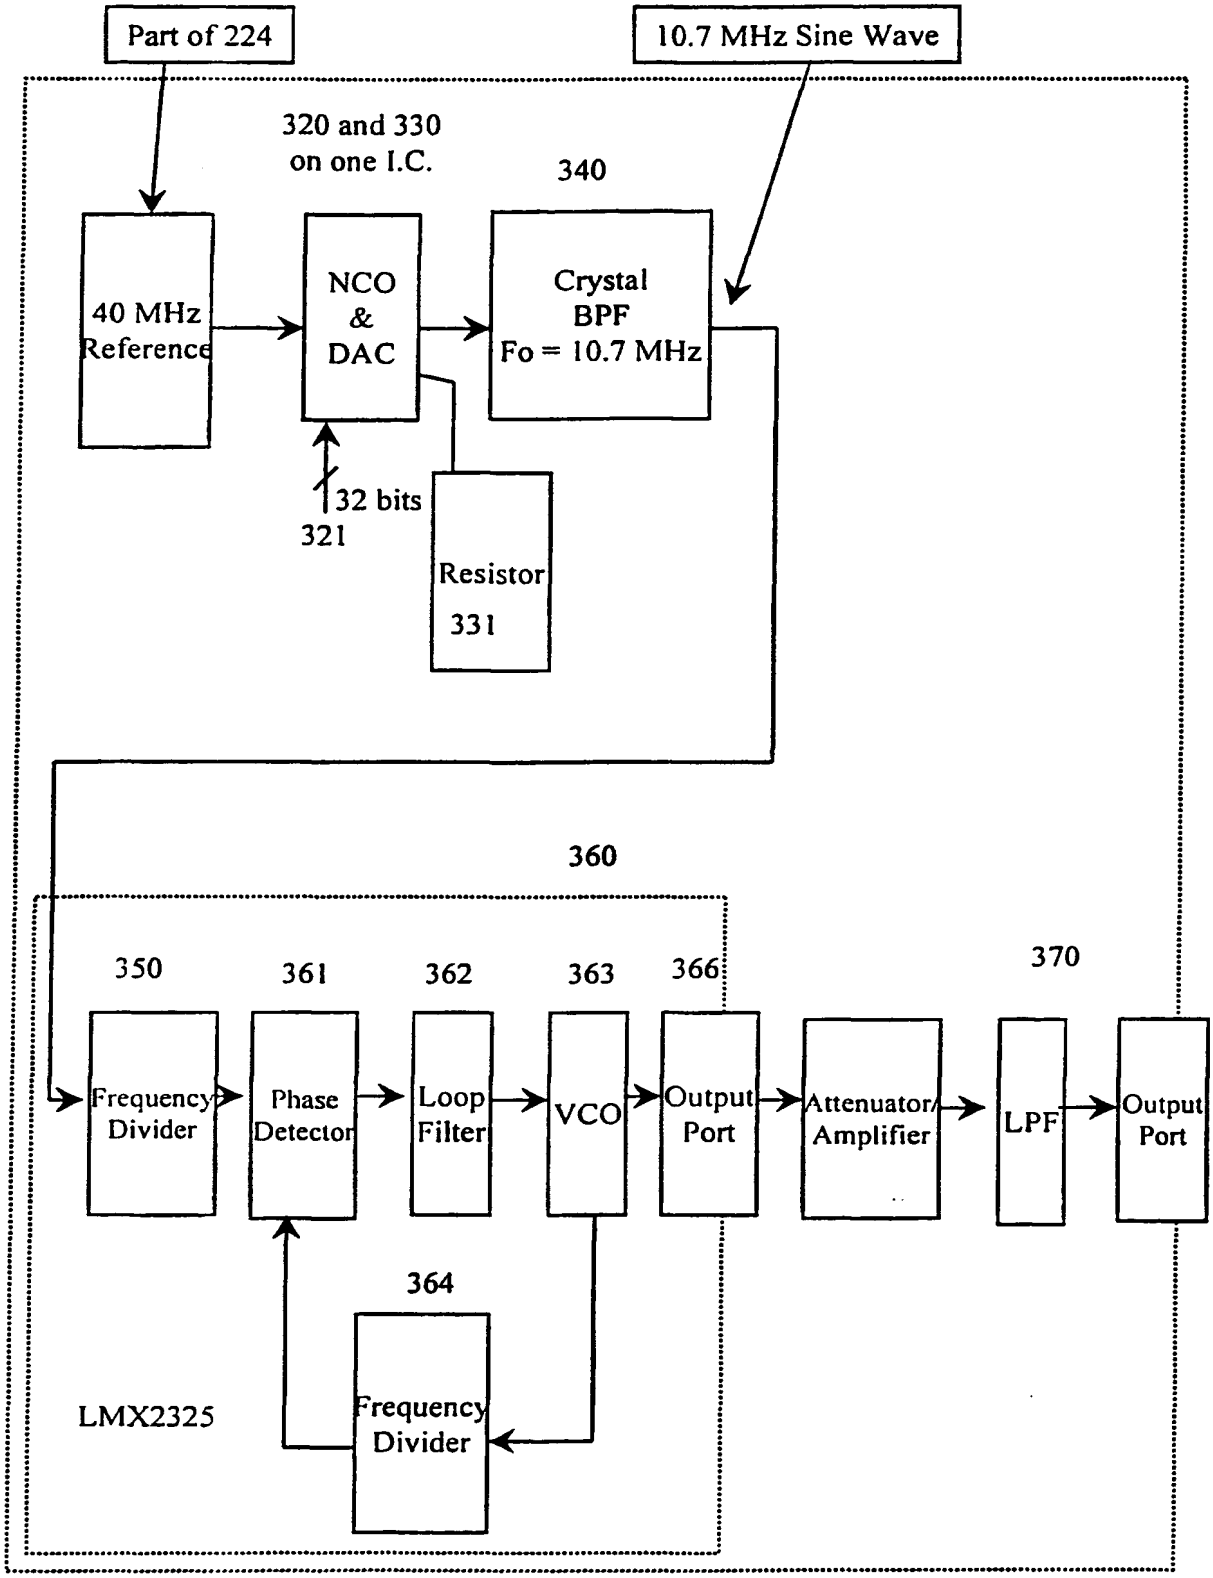

Figure 3

Triplex Function Block Diagram

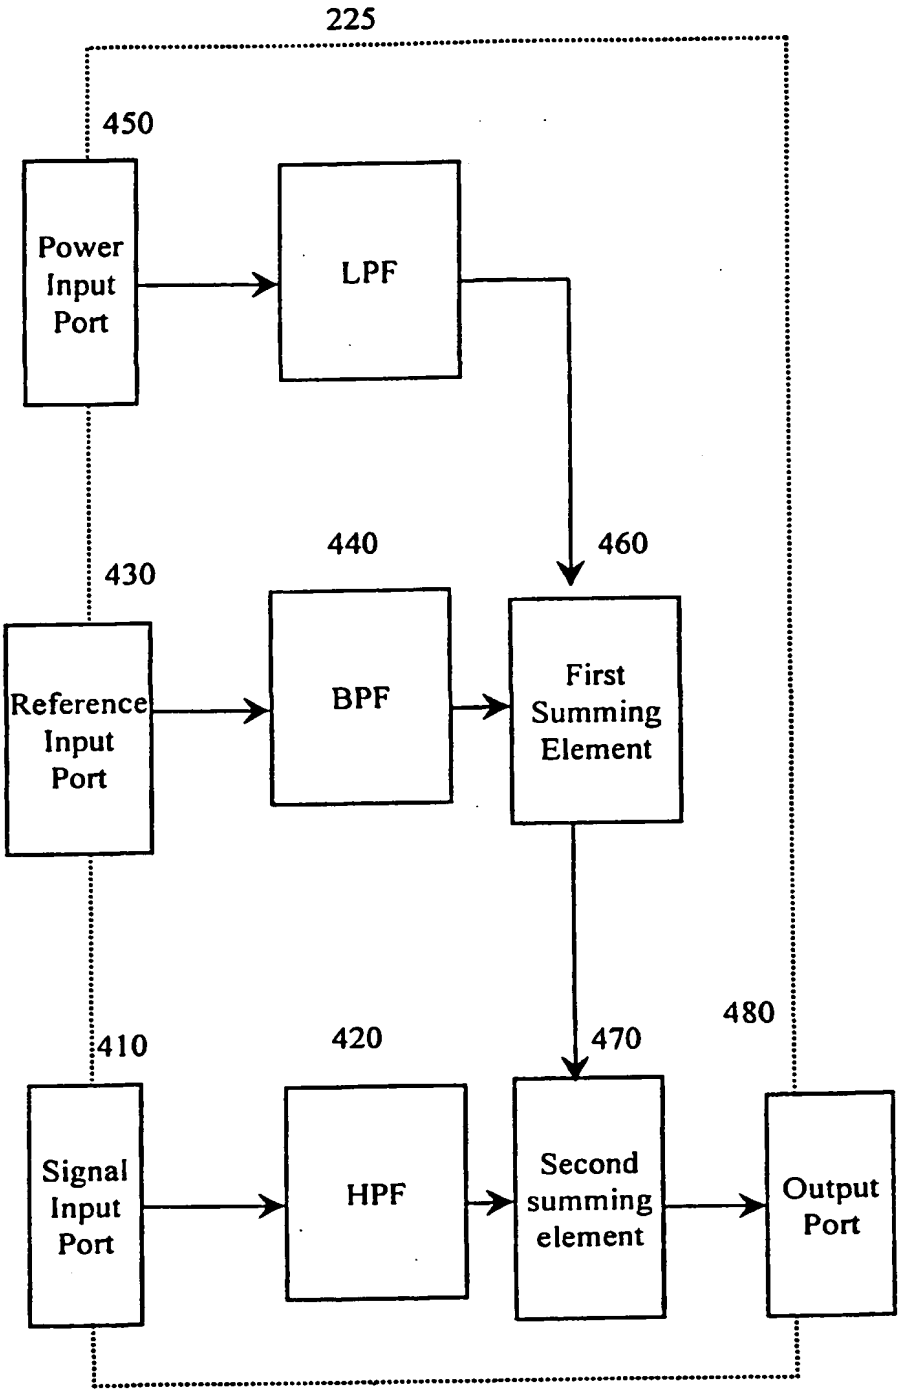

Figure 4

Summing Elements Block Diagram

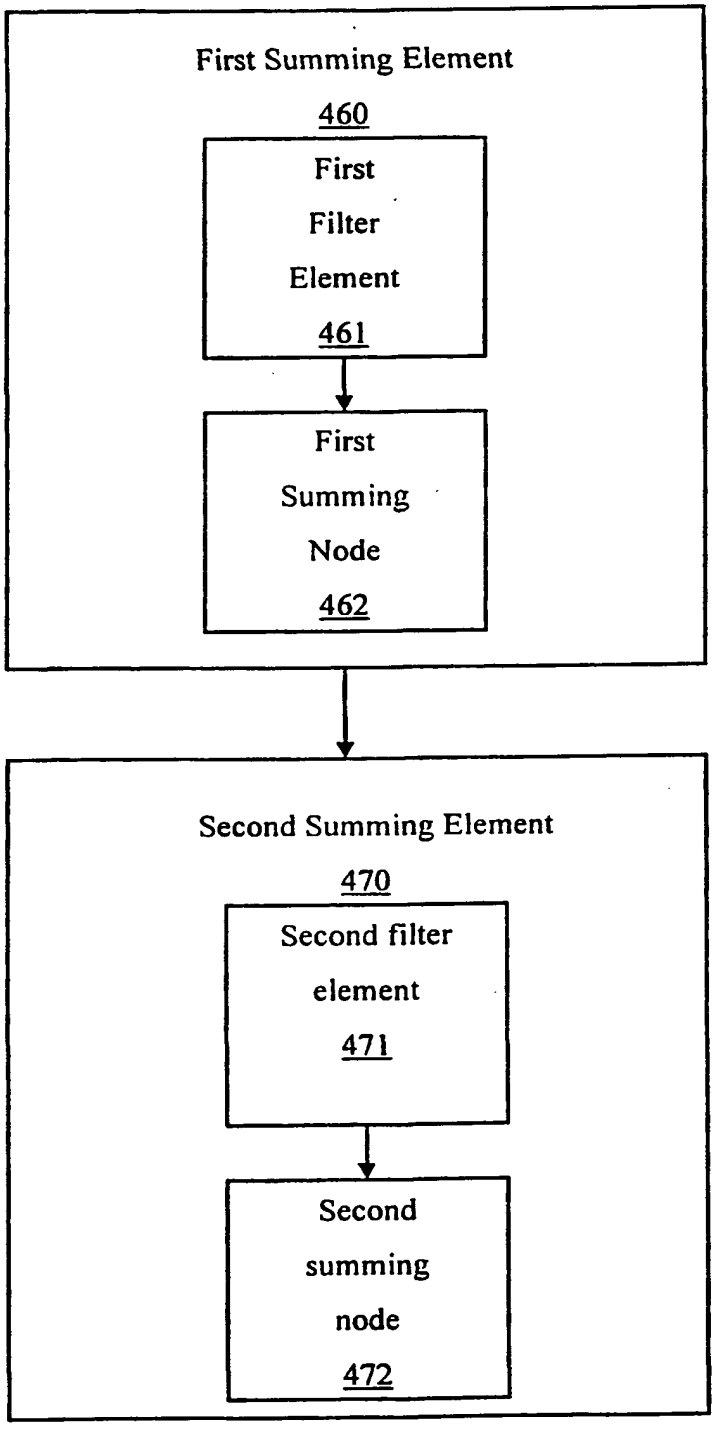

Figure 5

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.